


## Model 1126 Multi-Stacking Banana Plug To Stacking Pin Tip Plug

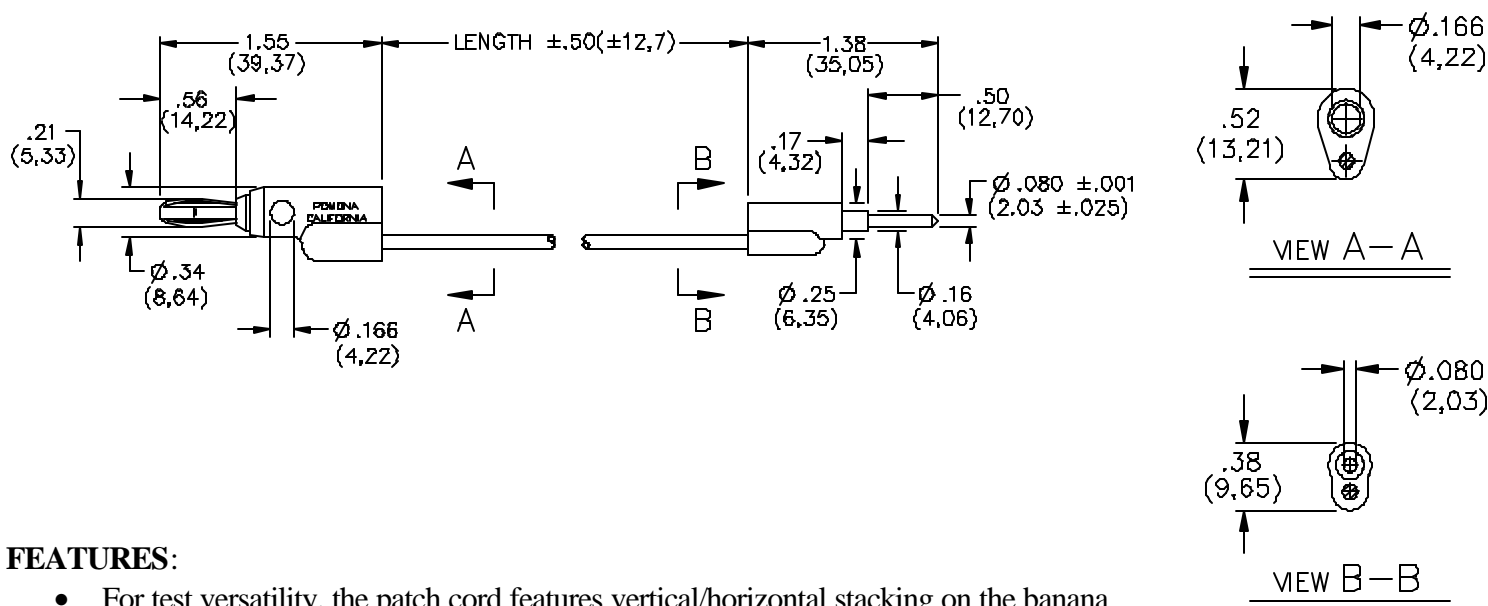

### FEATURES:

- For test versatility, the patch cord features vertical/horizontal stacking on the banana plug and vertical stacking on the pin tip side.
- Patch cord converts a pin tip jack to a banana plug or a banana jack to a pin tip plug.
- Banana and Pin Tip Plugs are molded directly to the wire for long life.

### MATERIAL:

Banana Plug: Spring – Beryllium Copper, Nickel Plated

Body: Brass, Nickel Plated

Insulation: Polypropylene, Color matches wire

Wire: 20 AWG, Stranding 41 x 36 Tinned Copper, PVC Insulated, .087" (2.21mm) O.D.

Color per part number. Marking: MODEL 1126-\*

Pin Tip Plug: Body – Brass, Gold Plated

Stackup Spring: Beryllium Copper, Gold Plated

Insulation: Polypropylene, Color matches wire

### RATINGS:

Voltage: Hand-held Testing: 30VAC/60VDC MAX.

Hands Free Testing in Controlled Voltage environments: 3000 WVDC

Operating Temperature: +55°C (+131°F)

Current: 5 Amperes Max.

### ORDERING INFORMATION: Model 1126-X-\*

X = Length, Standard Lengths: 4" (10,16cm), 8" (20,32cm), 12" (30,48cm), 18" (45,72cm), 24" (60,96cm), 36" (91,44cm), 48" (121,92), & 60" (152,40cm). Custom lengths can be quoted upon request.

\* = Color, -0 Black, -2 Red. Ordering Example: 1126-24-2 Patch cord will be 24" (60,96cm), color red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FI\IukeDataSheet\d1126\_1\_01.doc

Sales: 800-490-2361 Fax: 888-403-3360

Technical Assistance: 800-241-2060

PomonaACCESS 90430 (800) 444-6785 or (425) 446-6010

More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1