




(2,00mm) .0787"

TCMD SERIES

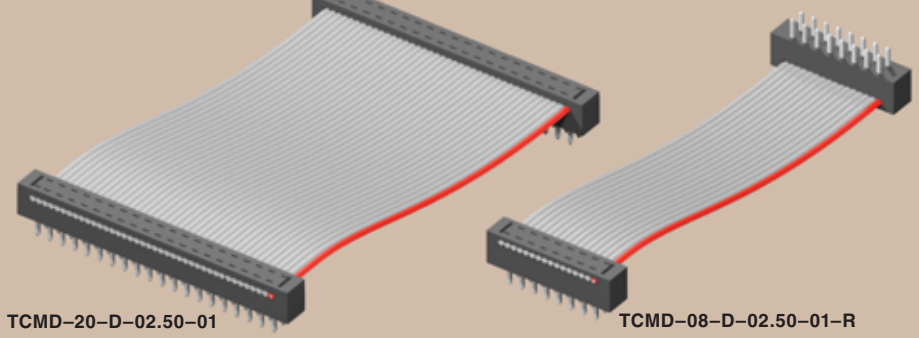

HIGH RELIABILITY IDC HEADER CABLE

Mates with:
SMM*, MMS*

SPECIFICATIONS

For complete specifications see www.samtec.com?TCMD

Insulator Material:

Black Glass Filled Polyester



Terminal:

Phosphor Bronze

Plating: Sn over 50µ" (1,27µm) Ni

Wire:


28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator

Current Rating: 1A

Operating Temp Range: -40°C to +105°C

RoHS Compliant: Yes





Yes

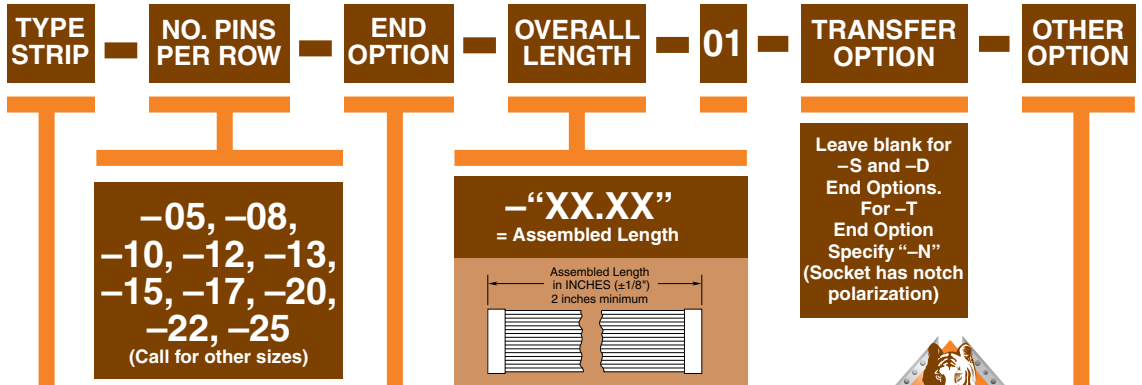

NO. PINS PER ROW
-05, -08,
-10, -12, -13,
-15, -17, -20,
-22, -25
(Call for other sizes)









OVERALL LENGTH
- "XX.XX"
= Assembled Length
Assembled Length in INCHES (±1/8")
2 inches minimum

TRANSFER OPTION
Leave blank for -S and -D End Options. For -T End Option Specify "-N" (Socket has notch polarization)

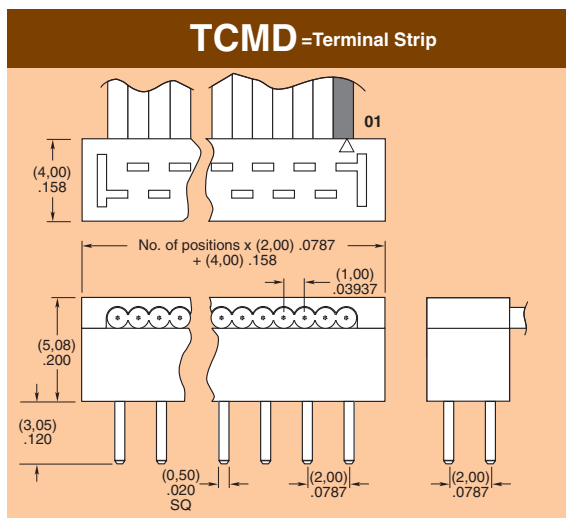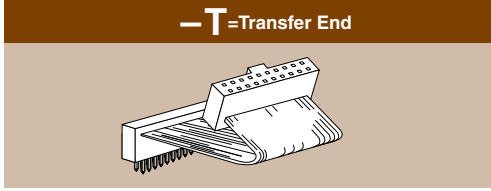

*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. See drawing on web.

Note: TCMD Series assemblies are non-standard, non-returnable.

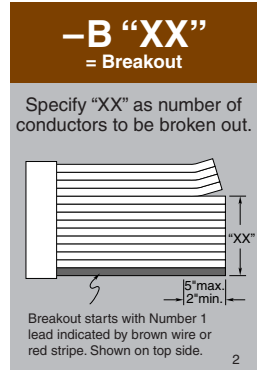

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329 SAMTEC UK • Tel: 44 01236 739292
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103786
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 SAMTEC ANZ • Tel: 613 9512 7747