


(1,27mm) .050"

SFSS, SFSST, SFSD, SFSDT SERIES

SFSD-20-30-G-05.00-D-NDS

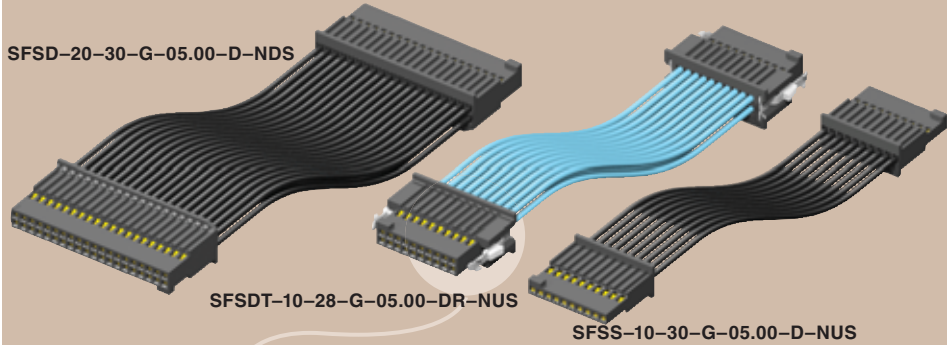

SFSDT-10-28-G-05.00-DR-NUS

SFSS-10-30-G-05.00-D-NUS

TIGER EYE™ DISCRETE WIRE CABLES

SPECIFICATIONS

For complete specifications see www.samtec.com?SFSS, www.samtec.com?SFSD, www.samtec.com?SFSDT or www.samtec.com?SFSST

Insulator Material:
Black LCP

Contact Material:
BeCu

Plating:

Au over 50µ" (1,27µm) Ni

Operating Temp Range:

-55°C to +80°C (PVC)

-55°C to +125°C (*Teflon®)

Voltage Rating:

275 VAC (PVC)


235 VAC (*Teflon®)

Wire: 28 or 30 AWG

RoHS Compliant:

Yes

Mates with:
TFM, TFC
(-SR & -DR requires
-WT option)



Single or
Double
Ended

28 or 30
AWG

(1,27mm)
.050"
pitch

Retention Latch
for Single or
Double row

CURRENT RATING	
AMBIENT TEMP	SFSD/TFC
20°C	3.7A
40°C	3.4A
60°C	2.9A
95°C	1.9A
6 POSITIONS (2x3) 28 AWG POWERED	

-SR/-DR APPLICATIONS

When Mated to TFM-WT

Terminal/Housing Retention	
Min	(22,25N) 5.0 lb
Max	(26,52N) 5.96 lb
Avg	(24,34N) 5.47 lb

Wire/Crimp Retention	
Min	(20,47N) 4.6 lb
Max	(36,49N) 8.2 lb
Avg	(29,95N) 6.73 lb

APPLICATION SPECIFIC OPTION

- Locking feature available for mating to the TFML Series
 - Color coded cable available (*Teflon® N/A)
 - Other plating options available
- Call Samtec.

*Teflon® is a trademark of Dupont.

Note: Some lengths, styles and options are non-standard, non-returnable.

TYPE STRIP	POSITIONS PER ROW	WIRE GAUGE	PLATING OPTION	ASSEMBLED LENGTH	END OPTION	END 2 OPTION
SFSS = Single Row PVC Cable SFSST = Single Row *Teflon® Cable SFSD = Double Row PVC Cable SFSDT = Double Row *Teflon® Cable	-05, -07, -10, -15, -20, -25, -30, -35, -40, -45, -50 (Call Samtec for other sizes)	-30 = 30 AWG -28 = 28 AWG	-G = 10µ" (0,25µm) Gold on contact, Gold Flash on balance	-"XX.XX" = Assembled Length in Inches (76,20mm) 03.00" min. for -S end option (82,60mm) 03.25" min. for -D end option	-S = Single Ended -D = Double Ended -SL* = Single Ended with Friction Lock -DL* = Double Ended with Friction Lock -SR = Single Ended with Retention Latch (TFM -WT option required for mating) -DR = Double Ended with Retention Latch (TFM -WT option required for mating)	Requires -D, -DR or -DL (End No. 1 Notch Up). -NUS = Notch up, straight -NDS = Notch down, straight -NUX = Notch up, crossed (SFSD/SFSDT only) -NDX = Notch down, crossed (SFSD/SFSDT only)

Technical drawings showing cross-sections and dimensions for SFSD, -D-NUS, SFSS, and -SR cable types. Dimensions include wire diameter (0.25), pitch (1.27), and various lengths and notches.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329 SAMTEC UK • Tel: 44 01236 739292
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103766
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 SAMTEC ANZ • Tel: 613 9512 7747