



(2,00mm) .0787"

TCMD SERIES



HIGH RELIABILITY IDC HEADER CABLE

Mates with:
SMM*, MMS*

SPECIFICATIONS

For complete specifications see www.samtec.com?TCMD

Insulator Material:

Black Glass Filled Polyester



Terminal:

Phosphor Bronze

Plating:

Sn over 50µ" (1,27µm) Ni

Wire:

28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator

Current Rating:

1A

Operating Temp Range:

-40°C to +105°C

RoHS Compliant:











Yes



-05, -08,
-10, -12, -13,
-15, -17, -20,
-22, -25
(Call for other sizes)

- "XX.XX"
= Assembled Length

Leave blank for -S and -D End Options. For -T End Option Specify "-N" (Socket has notch polarization)

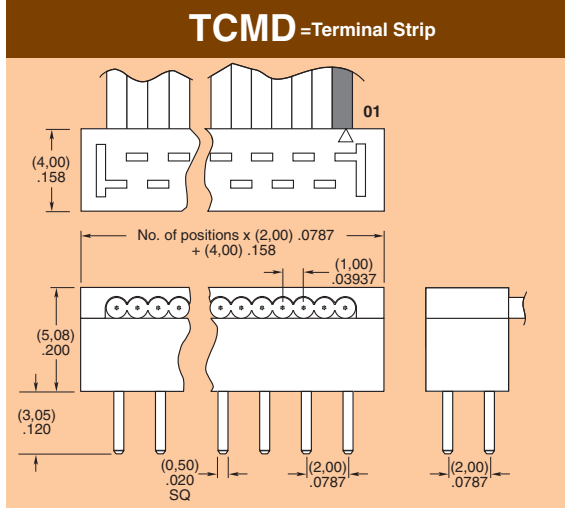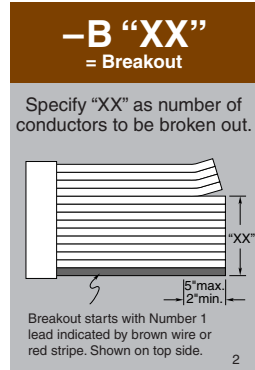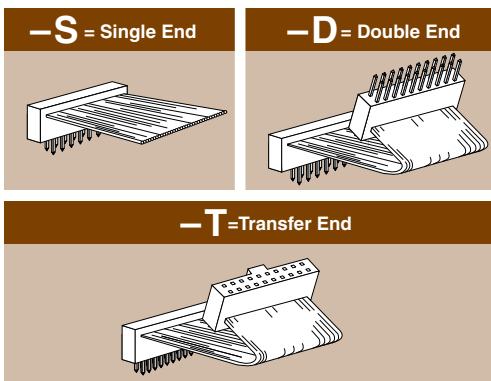

*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. (See drawing on web.) When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates with Pin 1, etc.

Note: TCMD Series assemblies are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 8690337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292 SAMTEC ISRAEL • Tel: 972-3-7526600
 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103766 SAMTEC TAIWAN • Tel: 886-2-2735-6109
 SAMTEC HONG KONG • Tel: 852-2600-9858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9512 7747 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112