

(2,00mm) .0787"

**TCMD SERIES** 






Mates with: SMM\*, MMS<sup>3</sup>

**SPECIFICATIONS** For complete specifications see www.samtec.com?TCMD Insulator Material: 51 Black Glass Filled ® File NO. E111594 Polyester Terminal: Phosphor Bronze Plating: Sn over 50μ" (1,27μm) Ni Wire: WIRE: 28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator Current Rating:

**Operating Temp Range:** -40°C to +105°C RoHS Compliant: Yes

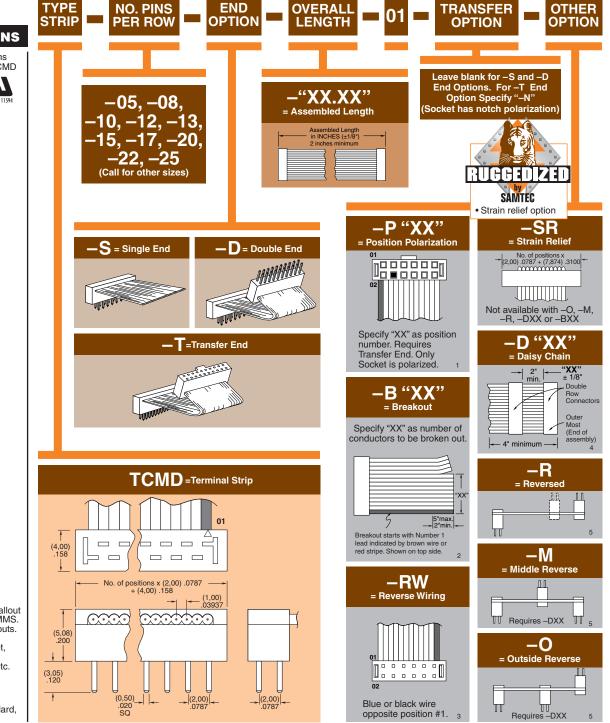

\*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. (See drawing on web.) When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates wth Pin 1, etc.

Note: TCMD Series assemblies are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice. WWW.SAMTEC.COM

SAMTEC USA • Tel: 1:000-SAMTEC:0 or 812:044-6733 SAMTEC SULICON VALLEY • Tel: 408:395-5000 SAMTEC SOUTHERN CALIFORNIA • Tel: 1:000-726-8329 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 SAMTEC FARACE • Tel: 33 01 60 950 66 00 SAMTEC ITALY • Tel: 1:000 950 66 00 SAMTEC ITALY • Tel: 1:000 950 66 00 SAMTEC CIALY • Tel: 300 950 950 55 SAMTEC JAPAN • Tel: 4:46-84477280 SAMTEC BENELUX • Tel: 401236 739292 SAMTEC ISRAEL • Tel: 92-3-7526600 SAMTEC IDIA • Tel: 4:01286 739292 1:012 SAMTEC CASA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 4:46-751385 SAMTEC JAPAN • Tel: 4:0286 739292 SAMTEC TALY • Tel: 9:408-2273-56109 Downloaded from Elcodis.com electrosmmechogigRones • tel: 93924280909858 SAMTEC KOREA • Tel: 82:31-717-5685 SAMTEC AXI • Tel: 61 39512 7747 SAMTEC SOUTH AFRICA • Tel: 2: 71 1452 8112