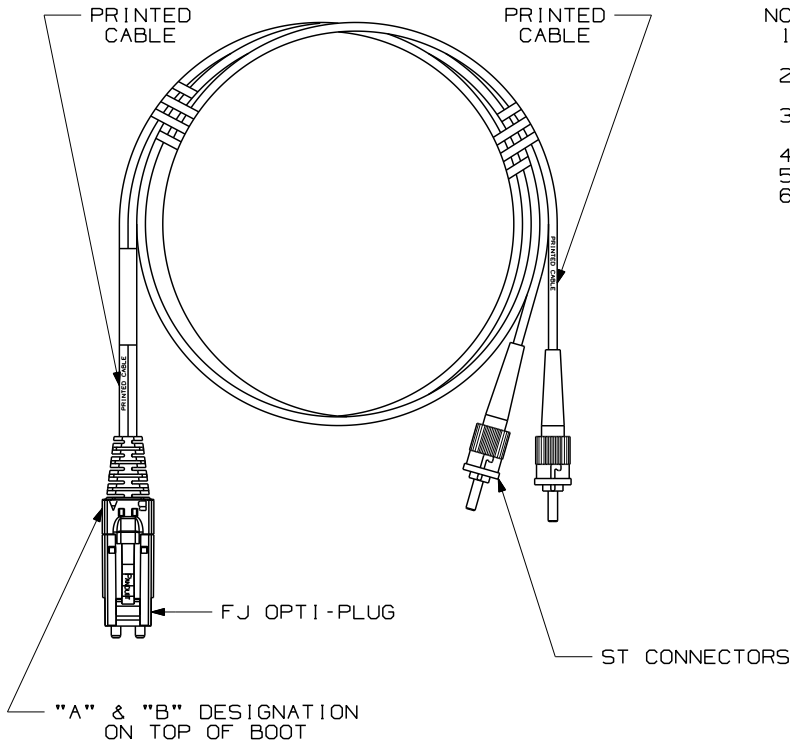




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



**NOTES:**

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

|     |          |    |     |                        |          |   |      |     |     |  |          |
|-----|----------|----|-----|------------------------|----------|---|------|-----|-----|--|----------|
|     |          |    |     |                        |          |   |      |     |     | <b>FIBER OPTIC PATCH CORD</b><br><b>FJ OPTI-PLUG TO ST CONFIGURATION</b><br>CUSTOMER DRAWING   |          |
|     |          |    |     |                        |          |   |      |     |     |  <b>PANDUIT</b> ™<br>CORP.<br>TINLEY PARK, ILL 60477   |          |
|     |          |    |     |                        |          |   |      |     |     |  ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.<br>DIMENSIONAL TOLERANCES ARE:<br>(.X) (.XXX) ± .010 (.0.3)<br>(.XX) ± .03 (.0.8) ANGLES |          |
|     |          |    |     |                        |          |   |      |     |     | DRAWING FILENAME<br><b>M02779BJ_DC_00A.prt</b><br>SCALE<br>NONE  |          |
|     |          |    |     |                        |          |   |      |     |     | PART NO.<br><b>SEE TABLE, SHT. 2</b><br>DRAWING NO.<br><b>02779-16</b><br>(SHT. 1 of 2)  |          |
|     |          |    |     |                        |          |   |      |     |     | SIZE<br><b>A</b>   |          |
| R   | 06-05-07 | MC |     | RELEASED TO PRODUCTION | 02779-16 |   |      |     |     | DATE   | 05-10-07 |
| REV | DATE     | BY | CHK | DESCRIPTION            | ECN      | R | CUST | SUP | OTH | CHK'D  |          |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.




FJ OPTI-PLUG TO ST FIBER OPTIC PATCH CORD

| PANDUIT<br>PART NO. | CABLE           |                |                            |        | FJ OPTI-PLUG |         |                   | ST CONNECTOR |         |                    |
|---------------------|-----------------|----------------|----------------------------|--------|--------------|---------|-------------------|--------------|---------|--------------------|
|                     | RATING          | FIBER TYPE     | COUNT                      | COLOR  | MAX. IL      | MIN. RL | COLOR             | MAX. IL      | MIN. RL | COLOR              |
| F5D6P-2M*Y          | RISER<br>(OFNR) | 50/125um OM2   | DUPLEX<br>3.0mm<br>ZIPCARD | ORANGE | 0.30dB       | 20dB    | ELECTRIC<br>IVORY | 0.30dB       | 20dB    | METALLIC<br>FINISH |
| F6D6P-2M*Y          |                 | 62.5/125um OM1 |                            | ORANGE | 0.30dB       | 20dB    | ELECTRIC<br>IVORY | 0.30dB       | 20dB    | METALLIC<br>FINISH |
| F9D6P-2M*Y          |                 | 9/125um OS1    |                            | YELLOW | 0.75dB       | 55dB    | BLUE              | 0.75dB       | 55dB    | METALLIC<br>FINISH |

\* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

| REV | DATE     | BY | CHK | DESCRIPTION            | ECN      | R | CUST | SUP | OTH |
|-----|----------|----|-----|------------------------|----------|---|------|-----|-----|
| R   | 06-05-07 | MC |     | RELEASED TO PRODUCTION | 02779-16 |   |      |     |     |

|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|
| FIBER OPTIC PATCH CORD<br>FJ OPTI-PLUG TO ST CONFIGURATION<br>CUSTOMER DRAWING                                 |  |  |  |  |  |  |  |  |  |
|                            |  |  |  |  |   |  |  |  |  |
|  THIRD ANGLE<br>PROJECTION |  |  |  |  | ALL DIMENSIONS ARE GIVEN IN INCHES<br>UNLESS OTHERWISE SPECIFIED.<br>DIMENSIONAL TOLERANCES ARE:<br>(.X) (.XX) ± .03 (0.8) ANGLES<br>(.XXX) ± .010 (0.3) |  |  |  |  |
| DRAWN BY MC  |  |  |  |  | REVIEW DRAWING NUMBERS   |  |  |  |  |
| DATE 05-10-07  |  |  |  |  | PART NO. SEE TABLE   |  |  |  |  |
| CHK'D  |  |  |  |  | DRAWING NO. 02779-16<br>(SHT. 2 of 2)  |  |  |  |  |
|  |  |  |  |  | SIZE A   |  |  |  |  |