


(2,00mm) .0787" **TCMD SERIES**



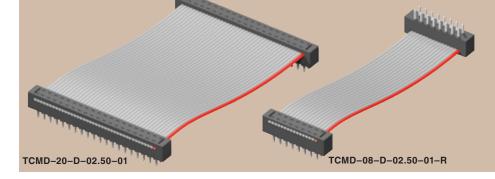

HIGH RELIABILITY IDC HEADER CABLE

Mates with: SMM*, MMS³

SPECIFICATIONS

For complete specifications see www.samtec.com?TCMD

Insulator Material: Black Glass Filled Polyester Terminal: Phosphor Bronze Plating: Sn over 50μ" (1,27μm) Ni 28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator Current Rating:

Operating Temp Range:

-40°C to +105°C RoHS Compliant:

*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. (See drawing on web.) When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates wth Pin 1, etc.

Note: TCMD Series assemblies are non-standard, non-returnable.

