




(2,00mm) .0787"

TCMD SERIES

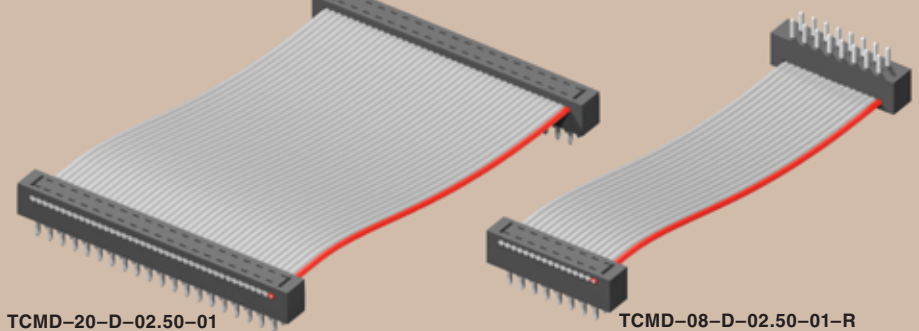

# HIGH RELIABILITY IDC HEADER CABLE

Mates with:  
SMM\*, MMS\*

## SPECIFICATIONS

For complete specifications see [www.samtec.com?TCMD](http://www.samtec.com?TCMD)

**Insulator Material:**

Black Glass Filled Polyester



**Terminal:**

Phosphor Bronze

**Plating:** Sn over 50µ" (1,27µm) Ni

**Wire:**




28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator

**Current Rating:** 1A

**Operating Temp Range:** -40°C to +105°C


**RoHS Compliant:** Yes

Yes

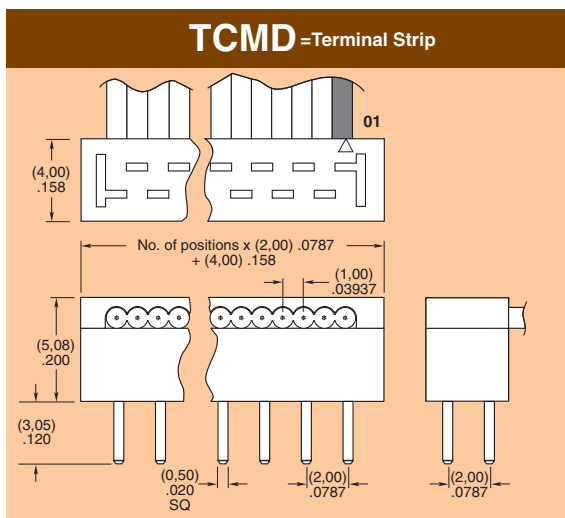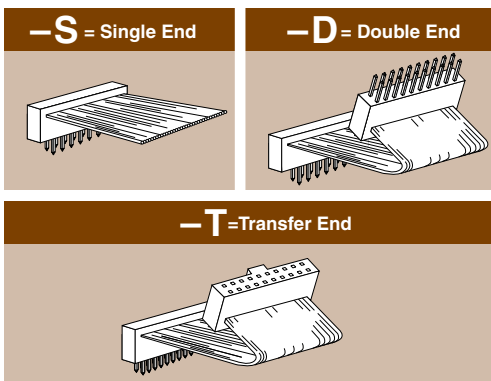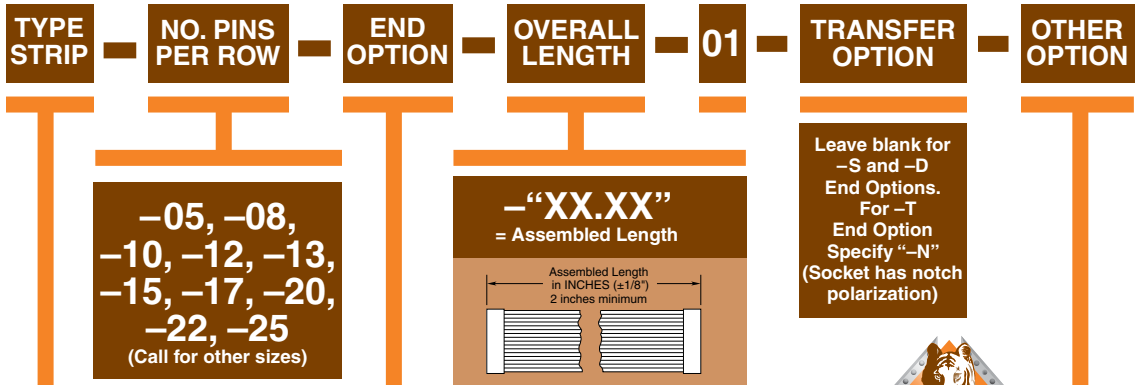

\*Note: Standard TCMD callout will not mate with SMM, MMS. Must use gold plated callouts. See drawing on web.

Note: TCMD Series assemblies are non-standard, non-returnable.

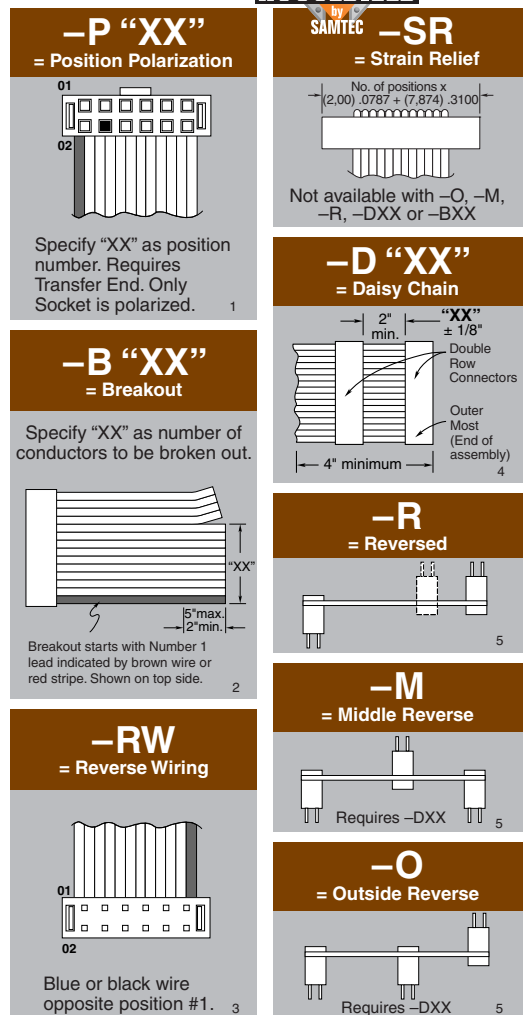

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329 SAMTEC UK • Tel: 44 01236 739292  
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292  
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103786  
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 SAMTEC ANZ • Tel: 613 9512 7747