




(1,27mm) .050"

TFSS, TFSST, TFSD, TFSDT SERIES

TFSDT-05-30-G-05.00-D-NUS

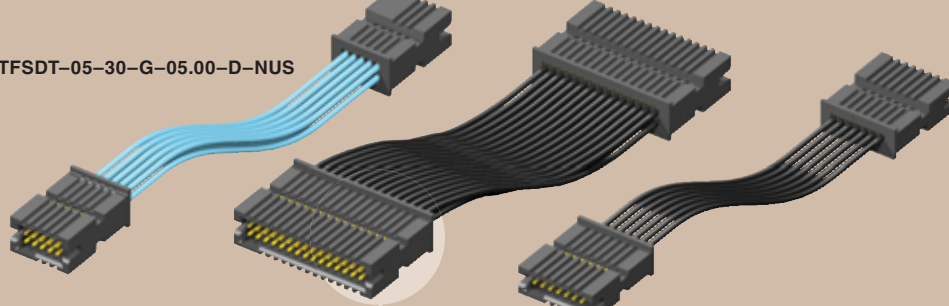

TFSD-15-30-G-05.00-D-NUX

TFSS-07-28-G-05.00-D-NUS

# TIGER EYE™ DISCRETE WIRE CABLES

## SPECIFICATIONS

For complete specifications see [www.samtec.com?TFSS](http://www.samtec.com?TFSS)  
[www.samtec.com?TFSD](http://www.samtec.com?TFSD),  
[www.samtec.com?TFSDT](http://www.samtec.com?TFSDT), or  
[www.samtec.com?TFSST](http://www.samtec.com?TFSST)

**Insulator Material:**

Black LCP

**Contact Material:**

BeCu

**Plating:**

Au over 50µ" (1,27µm) Ni

**Operating Temp Range:**

-55°C to +80°C (PVC)

-55°C to +125°C (\*Teflon®)

**Wire:**

28 or 30 AWG

**RoHS Compliant:** Yes




**Mates with:**  
 SFM, SFC (-TR requires  
 TFM-WT option),  
 SFML (-XL end option  
 required)

Single or  
 Double  
 Ended

28 or 30  
 AWG

(1,27mm)  
 .050"  
 pitch

Optional  
 Friction Lock  
 available



## APPLICATION SPECIFIC OPTION

- Color coded cable available (\*Teflon® N/A)
  - Other plating options available
- Call Samtec.

TYPE STRIP	POSITIONS PER ROW	WIRE GAUGE	PLATING OPTION	ASSEMBLED LENGTH	END OPTION	END 2 OPTION
<b>TFSS</b> = Single Row PVC Cable  <b>TFSST</b> = Single Row *Teflon® Cable  <b>TFSD</b> = Double Row PVC Cable  <b>TFSDT</b> = Double Row *Teflon® Cable	-05, -07, -10, -15, -20, -25, -30, -35, -40, -45, -50 (Call Samtec for other sizes)	-30 = 30 AWG  -28 = 28 AWG	-G = 10µ" (0,25µm) Gold on contact	-"XX.XX" = Assembled Length in Inches (76,20mm) 03.00" min. for -S end option (82,60mm) 03.25" min. for -D end option	-S = Single Ended  -SL* = Single Ended with Friction Lock  -D = Double Ended  -DL* = Double Ended with Friction Lock  -T = Transfer End Terminal on End 1 Socket on End 2  -TL* = Transfer End with Friction Lock  -TR = Transfer End with Retention Latch (TFM -WT option required for mating)	Requires -D, -DL, -T, -TL or -TR (End No. 1 Notch Up).  -NUS = Notch up, straight  -NDS = Notch down, straight  -NUX = Notch up, crossed (TFSD/ TFSDT only)  -NDX = Notch down, crossed (TFSD/ TFSDT only)

\*Teflon® is a trademark of Dupont.

**Note:** For wiring option information refer to drawing on web.

**Note:** Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329  
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0  
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 8990337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292 SAMTEC ISRAEL • Tel: 972-3-7526600  
 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103766 SAMTEC TAIWAN • Tel: 886-2-2735-6109  
 Downloaded from Elcodis.com SAMTEC HONG KONG • Tel: 852-2600-9858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9512 7747 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112