


MECT-115-01-M-D-RA1



SFP-PCF

(0,80mm) .0315"

MECT, SFP, SFPK SERIES

SFP & SFP+ TRANSCEIVER INTERFACES

Mates with:
SFPE & SFP, SFP+, XFP
or XENPAK transceivers
(For MSA specifications
see www.schelto.com)


SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MECT

Insulator Material: Black LCP
Contact Material: Phosphor Bronze
Plating: Sn or Au over 100µ" (2,54µm) Ni
Operating Temp Range: -55°C to +125°C
Current Rating: 2A @ 80°C ambient (see website for details)
Voltage Rating: 265 VAC
RoHS Compliant: Yes




Processing:
Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0,10mm) .004" max (10-35)

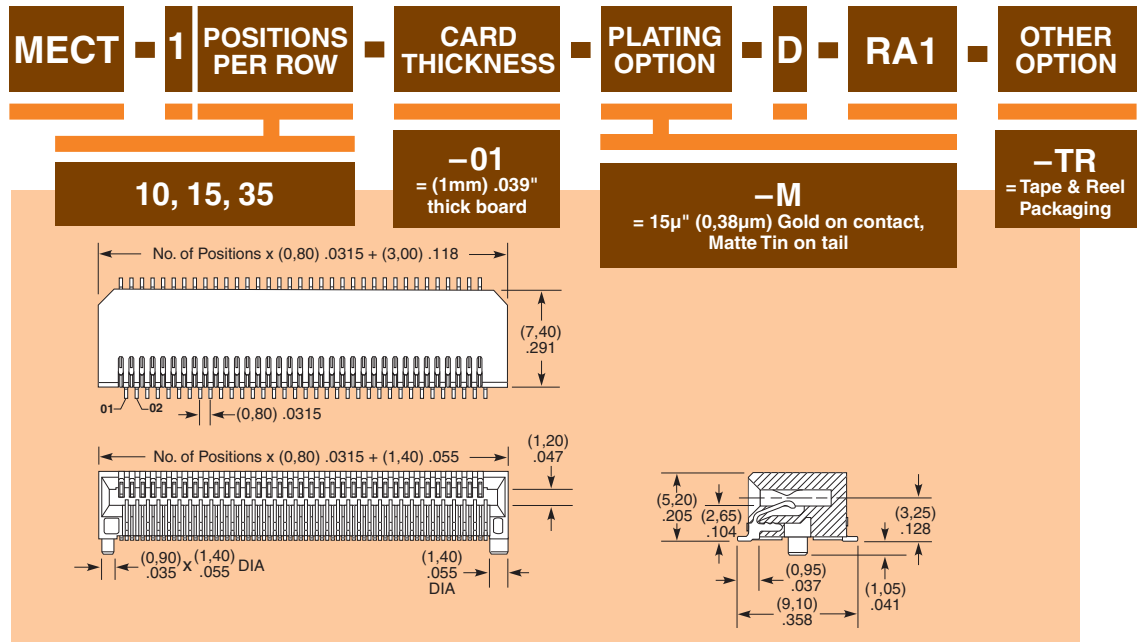

Use with: MECT


SPECIFICATIONS

For complete specifications see www.samtec.com?SFP or www.samtec.com?SFPK
For SFP specifications see www.schelto.com/SFP

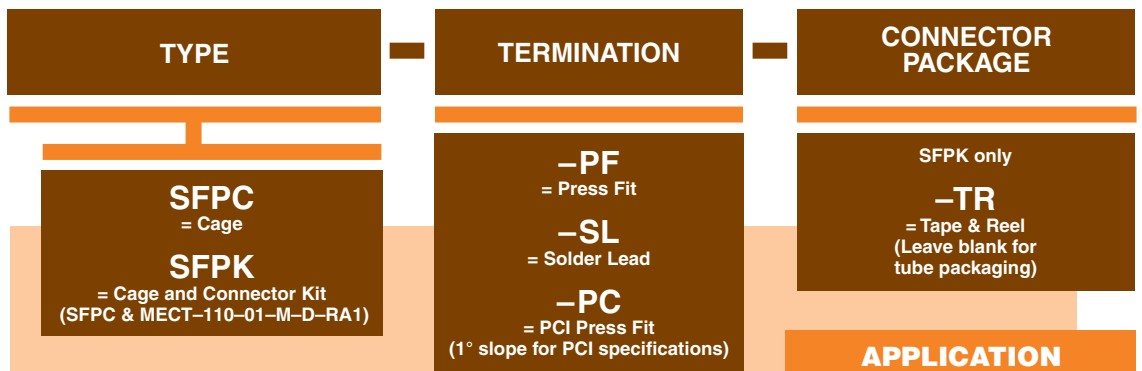


ALSO AVAILABLE

Two and four ganged cages in design.
Call Samtec.

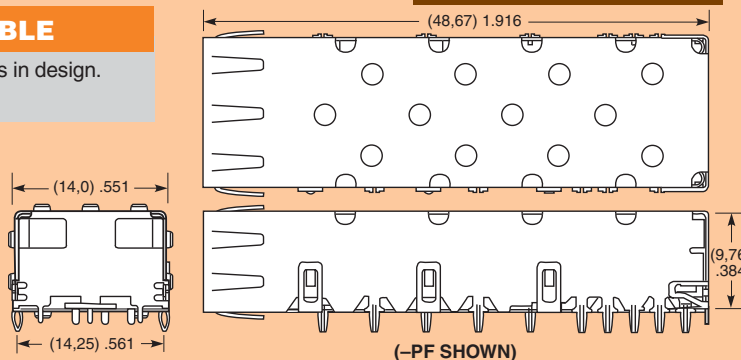

APPLICATION

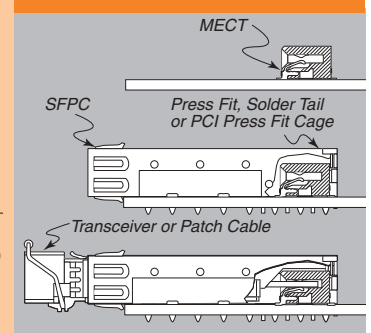

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM