




(2,54mm) .100"

MMSD, MMSDT, MMSS, MMSST, IPD1 SERIES

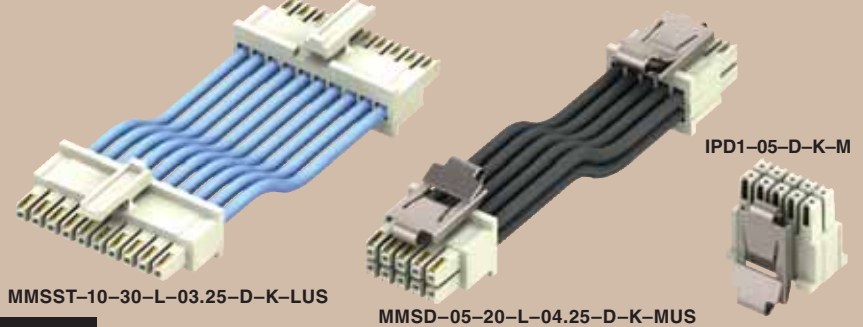

# DISCRETE WIRE CABLE ASSEMBLY

Mates with: IPL1  
(Does not mate with IPT1)

## SPECIFICATIONS

For complete specifications see [www.samtec.com?MMSD](http://www.samtec.com?MMSD), [www.samtec.com?MMSDT](http://www.samtec.com?MMSDT), [www.samtec.com?MMSS](http://www.samtec.com?MMSS), [www.samtec.com?MMSST](http://www.samtec.com?MMSST) or [www.samtec.com?IPD1](http://www.samtec.com?IPD1)

**Insulator Material:** Nylon 66  
**Contact Material:** Phosphor Bronze  
**Plating:** Au or Sn over 50µ" (1,27µm) Ni  
**Operating Temp Range:** -55°C to +105°C (20-26 AWG)  
-55°C to +80°C (28-30 AWG)  
-55°C to +125°C (\*Teflon®)  
**Voltage Rating:** 22 to 30 AWG = 300 VAC/424 VDC  
20 AWG = 600 VAC/848 VDC (PVC)  
**Wire:** 20 to 30 AWG  
**RoHS Compliant:** Yes



CURRENT RATING	
AMBIENT TEMP	MMSD/IPL1
20°C	7.4A
40°C	6.5A
60°C	5.9A
95°C	3.8A

6 POSITIONS (2x3)  
20 AWG POWERED

## APPLICATION SPECIFIC OPTION

- Other color coded cables (\*Teflon® N/A).
- Other sizes/pin counts.
- With or without Plug Polarization (omit pin 1).
- Other Gold plating options. Call Samtec.

## APPLICATION

-24C CABLE COLOR CODING	
PIN	COLOR
1	BROWN
2	RED
3	ORANGE
4	YELLOW
5	GREEN
6	BLUE
7	VIOLET
8	GRAY
9	WHITE
10	BLACK
ETC	REPEAT

**Note:** For wiring option information refer to drawing on web.

**Note:** Some lengths, styles and options are non-standard, non-returnable.

TYPE	PINS PER ROW	WIRE GAUGE	PLATING OPTION	ASSEMBLY LENGTH	END OPTION	K	LATCH OPTION
MMSD = Double Row PVC Cable	-02, -05, -10,	-20 -22 -24	-L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail	- "XX.XX" = Assembly Length in Inches (82,55mm) 03.25" min.	-S = Single End -D = Double End (Latch Required)	-K = Keyed Polarization	
MMSDT = Double Row *Teflon® Cable (24, 28 & 30 AWG only)	-15, -16, -20, -25	-24C = Color Coded Cable -26 -28 -30	-D-K-MUS				
MMSS = Single Row PVC Cable							
MMSST = Single Row *Teflon® Cable (24, 28 & 30 AWG only)							

Diagram showing dimensions: No. of positions x (2,54) .100, 25 + (1,40) .055, (8,89) .350, (2,54) .100, (12,83) .505, (1,52) .060, (17,93) .706, (1,57) .062 DIA, (1,91) .075, (3,81) .150, (3,17) .1250

**RUGGEDIZED by SAMTEC**

- Individually shrouded contacts
- Metal or plastic latches

Diagram showing latches: -M & -MXX (MMSD/MMSDT), -D-K-LUS, -M = Single Ended, Metal Latches (Leave blank for plastic), Double Ended (-D) Crossed requires MMSD/MMSDT, -LUS = Plastic Latch up, straight, -LDS = Plastic Latch down, straight, -LUX = Plastic Latch up, crossed, -LDX = Plastic Latch down, crossed, -MUS = Metal Latch up, straight, -MDS = Metal Latch down, straight, -MUX = Metal Latch up, crossed, -MDX = Metal Latch down, crossed

TYPE	POSITIONS PER ROW	ROW OPTION	K	LATCH OPTION	TYPE	WIRE GAUGE	01	PLATING OPTION
IPD1 = Body, Loose	-02, -05, -10, -15, -16, -20, -25	-S = Single Row -D = Double Row	-K = Keyed Polarization	-M = Metal Latch (Leave blank for plastic latch)	CC79L = Contact, Loose CC79R = Contact, Full Reel (15,000 Parts per Reel)	-2630 = 26 to 30 AWG -2024 = 20 to 24 AWG		-L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail

**HAND TOOLS**

20 to 24 AWG: CAT-HT-179-2024-11  
26 to 30 AWG: CAT-HT-179-2630-11

Diagram showing dimensions: (12,83) .505, (7,24) .285, (17,93) .706, (1,57) .062 DIA, (1,91) .075, (3,81) .150, (3,17) .1250

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM