



This is issued in strict confidence on condition that it is not used as a basis for manufacture or sale, and that it is not copied, reprinted or disclosed to a third party either wholly or in part without prior written consent of ITT Cannon.

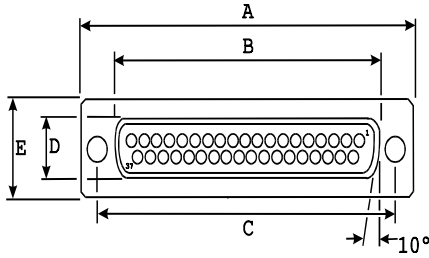


No mounting hardware selected  
with 3,05 (.120) mounting hole




Signal contacts  
not shown for clarity

A ± 0,38 (.015)	B ± 0,13 (.005)	C ± 0,13 (.005)	D ± 0,13 (.005)	E ± 0,38 (.015)	L ± 0,25 (.010)	W ± 0,41 (.016)	K ± 0,32 (.013)
69,32 (2.729)	54,84 (2.159)	63,50 (2.500)	7,90 (.311)	12,55 (.494)	0,76 (.030)	6,94 (.273)	1,21 (.048)

Straight signal contacts



Signal contact diameter	Signal contact length from back of insulator
Y ± 0,04 (.002)	X ± 0,69 (.027)
1,00 (.040)	3,23 (.127)

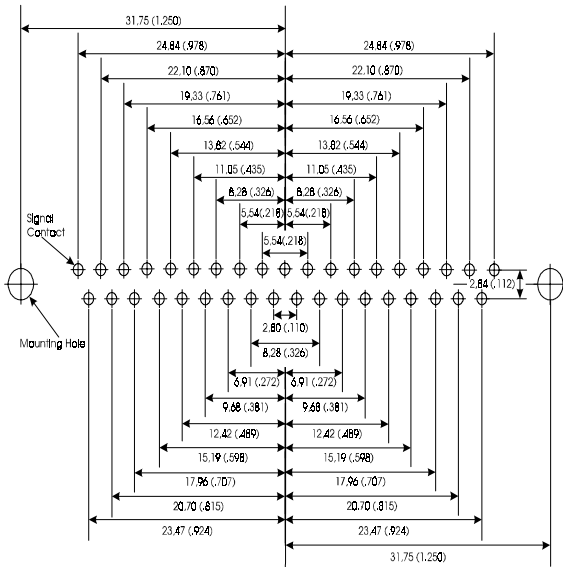

PCB mounting hole Ø (2)	PCB Signal cont Ø (37)
3,05 (.120) ± 0,05 (.002)	1,40 (.055)

NOTE: DO NOT MAKE ASSUMPTIONS REGARDING HOLE LOCATIONS, CHECK EACH DIMENSION

DESCRIPTION	MATERIAL	FINISH
Insulator	Polyester	None, (Color Dark Green)
Shells	Steel	Yellow Chromate over Zinc
Signal Contacts	Copper alloy	Gold over Ni in mating area, Tin on balance
Unless otherwise specified, dimensions are in mm & (in.)	Issue Date: 24-Aug-99	Cannon   ITT Industries
Tolerances are (.XXX = mm) Decimals Angles	CONNECTOR, RECEPTACLE, ELECTRICAL D-SUBMINIATURE 37 POSITION STRAIGHT PCB	
.X ± 0,20 (.008) X° ± 1,0°	PART NO.	<b>DCM37SB</b>
.XX ± 0,10 (.004)		
.XXX ± 0,05 (.002)		