

Splash Proof/Sealed Universal MATE-N-LOK Connectors (Continued)


Housings

Free Hanging or Panel Mount


.250 [6.35] Centerline spacing

Plugs and caps can accept pin or socket contacts


2, 3, 4, 5, 6, 8 and 10 Circuit, In-Line

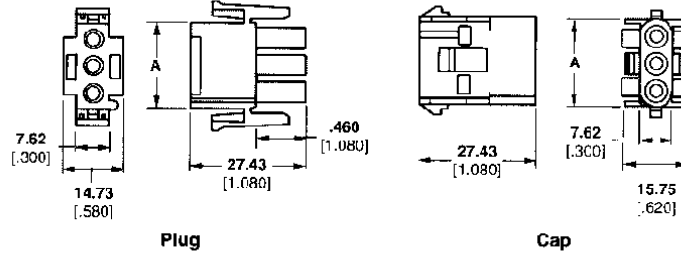

6 Circuit, Matrix

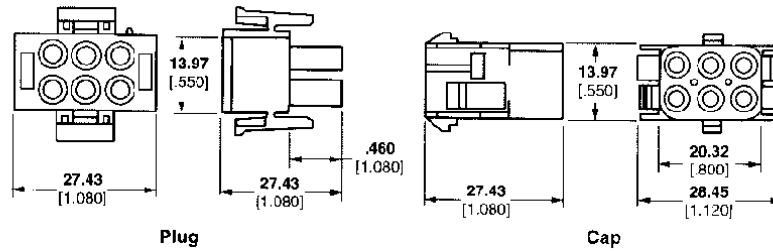

9, 12 and 15 Circuit, Matrix

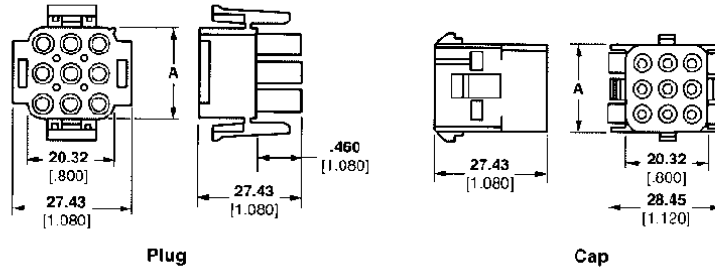

Number of Circuits	A Dim.	Housing Part Numbers			
		UL 94V-2 Nylon, Natural Color		UL 94V-0 Nylon	
		Plug	Cap	Plug	Cap
2	13.97 .550	1-480698-0 ¹	1-480699-0 ¹	350777-1 ¹	350778-1 ¹
3	20.32 .800	1-480700-0 ¹	1-480701-0 ¹	350766-1 ¹	350767-1 ¹
4	26.67 1.050	1-480702-0 ¹	1-480703-0 ¹	350779-1 ¹	350780-1 ¹
6	—	1-480704-0	1-480705-0	350715-1	350781-1
9	20.32 .800	1-480706-0	1-480707-0	350720-1	350782-1
12	26.67 1.050	1-480708-0	1-480709-0	350735-1	350783-1
15	33.02 1.300	1-480710-0	1-480711-0	350736-1	350784-1

¹In-Line style.