


CAT. NO. & DIMENSIONS

NO. OF CONTACTS	STRAIGHT TYPE CAT. NO.	RIGHT ANGLE TYPE CAT. NO.	DIMENSIONS(NOTE1)	
			A ±0.3	B ±0.1
4	SLP 4 S - 2 LF	SLP 4 R - 2 LF	11.15	6.45
5	SLP 5 S - 2 LF	SLP 5 R - 2 LF	12.40	7.70
6	SLP 6 S - 2 LF	SLP 6 R - 2 LF	13.65	8.95
7	SLP 7 S - 2 LF	SLP 7 R - 2 LF	14.90	10.20
8	SLP 8 S - 2 LF	SLP 8 R - 2 LF	16.15	11.45
9	SLP 9 S - 2 LF	SLP 9 R - 2 LF	17.40	12.70
10	SLP 10S - 2 LF	SLP 10R - 2 LF	18.65	13.95
11	SLP 11S - 2 LF	SLP 11R - 2 LF	19.90	15.20
12	SLP 12S - 2 LF	SLP 12R - 2 LF	21.15	16.45
13	SLP 13S - 2 LF	SLP 13R - 2 LF	22.40	17.70
14	SLP 14S - 2 LF	SLP 14R - 2 LF	23.65	18.95
15	SLP 15S - 2 LF	SLP 15R - 2 LF	24.90	20.20
16	SLP 16S - 2 LF	SLP 16R - 2 LF	26.15	21.45
17	SLP 17S - 2 LF	SLP 17R - 2 LF	27.40	22.70
18	SLP 18S - 2 LF	SLP 18R - 2 LF	28.65	23.95
19	SLP 19S - 2 LF	SLP 19R - 2 LF	29.90	25.20
20	SLP 20S - 2 LF	SLP 20R - 2 LF	31.15	26.45

CAT. NO.

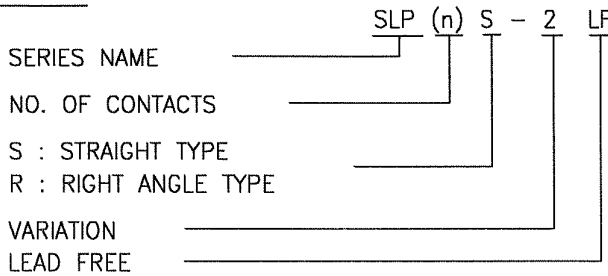

NOTES

1) SEE PART DRAWINGS FOR DIMENSIONS A & B


mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ✓ ISO 1101		projection		product family 58KF		CODE JP	
litr		ecn no		dr		date		tolerances unless otherwise specified		title	
A		J05-0713		H.T		10/21/05		angles		CAT.No. TABLE FOR	
B		J06-0504		H.T		11/29/06		linear		1.25mm SPACING CONNECTOR	
										(Cat. No. SLP__R/S-2LF)	
				dr		11/29/06		scale X		dwg no sheet 1 of 1 size	
				enr		11/29/06		FCI		JSA 96774 A4	
				chr		11/29/06				type Product Customer Drawing	
				appd		12/11/06					
sheet index		revision B		sheet		1				Rev. B	

SC-SLP05, JSA96775, 96776, 28248, 28249 form: A4



FCIconnect.com

Copyright FCI.

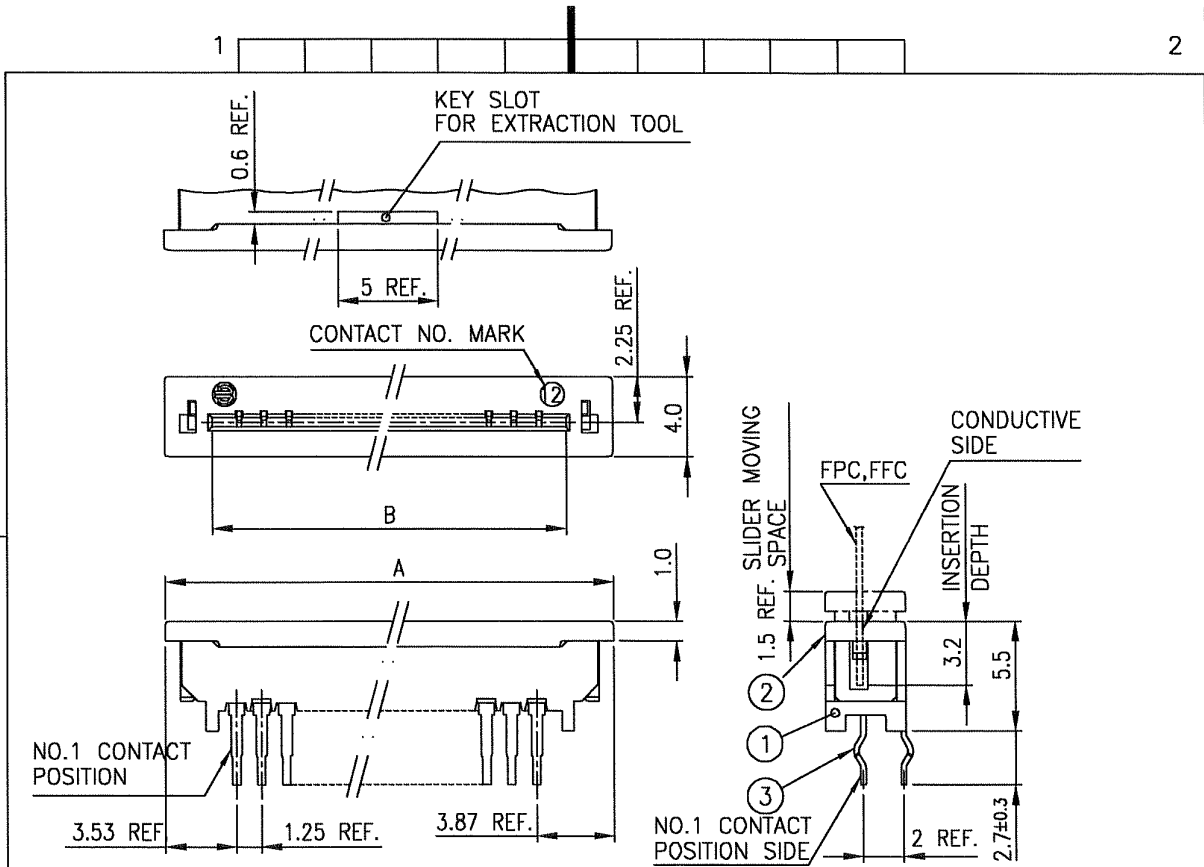


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	PET RESIN GLASS REINFORCED	1	COLOR : BLACK
2	SLIDER	(UL94V-0)	1	COLOR : GRAY
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : TIN Ni UNDER PLATED

n : NO. OF CONTACTS

**RECOMMENDED PC BOARD**

THICKNESS : 0.8~1.6  
HOLE PATTERN (COMPONENT SIDE)

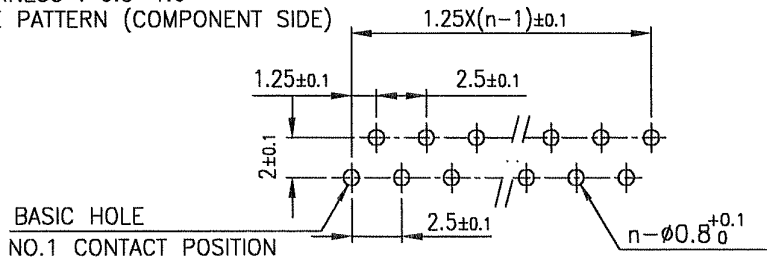

THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.

mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ✓		projection		product family 58KF		CODE JP	
litr		ecn no		dr		date		title		1.25mm SPACING CONNECTOR (Cat. No. SLP__S-2LF)	
A		J05-0713		H.T		10/21/05		mm		dwg no	
B		J06-0504		H.T		11/29/06		scale X		sheet 1 of 1	
				angles		linear ±0.2		FCJ		size A4	
				dr		11/29/06				type Product Customer Drawing	
				engr		11/29/06					
				chr		11/29/06					
				appd		12/11/06					

sheet index	revision sheet	B	1									Rev B
-------------	----------------	---	---	--	--	--	--	--	--	--	--	-------



SC-SLP05 JSA96774 form: A4



FCIconnect.com

Copyright FCI.




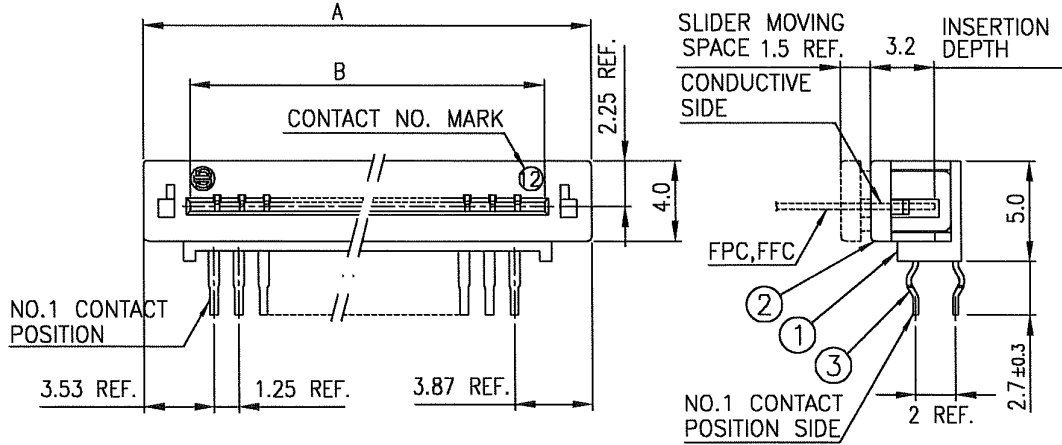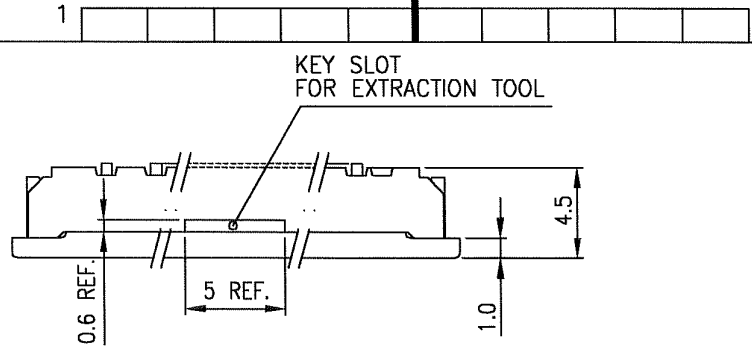

PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	PET RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER		1	COLOR : GRAY
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : TIN Ni UNDER PLATED

n : NO. OF CONTACTS

RECOMMENDED PC BOARD  
THICKNESS : 0.8~1.6  
HOLE PATTERN (COMPONENT SIDE)

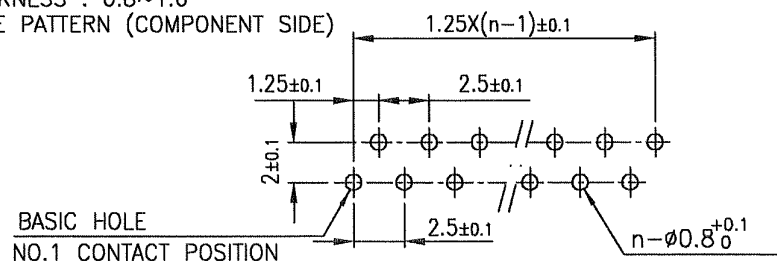

THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.  
THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family 58KF		CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title			
A	J05-0713	H.T	10/21/05	angles	linear	mm		1.25mm SPACING CONNECTOR (Cat. No. SLP__R-2LF)			
B	J06-0504	H.T	11/29/06			scale X		dwg no sheet 1 of 1 size			
				dr			FCI		JSA 96776		
				engr					type Product Customer Drawing		
				chr					Rev.		
				appd					B		
sheet index		revision B								D	
sheet 1										2	

SC-SLP05 form: A4 JSA96774




FCIconnect.com

Copyright FCI.

RECOMMENDED CABLE (FPC)

n : NO. OF CONDUCTOR

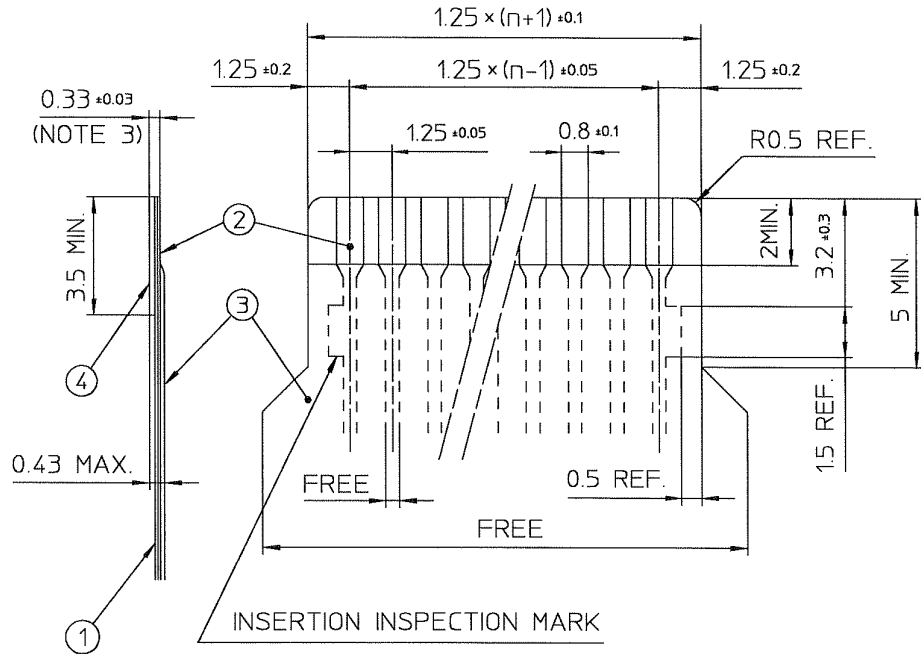

PT. NO.	PARTS NAME	MATERIAL	THICKNESS (μm)
1	BASE FILM	POLYIMIDE OR EQUAL	25
2	CONDUCTOR	COPPER FOIL (PLATING : SOLDER 1μm MIN. 12μm MAX.)	35
3	OVERLAY	POLYIMIDE OR EQUAL	—
4	SUPPORTING TAPE	POLYESTER OR POLYIMIDE OR EQUAL	188

NOTES.

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection ⊕		product family 58KF		
ltr	ecn no	dr	date	tolerances unless otherwise specified				title RECOMMENDED CABLE (Cat. No. SLP__R/S-2_)				
3		H.T	11/29/99	angles	linear			scale %		dwg no JSA 28248		
A	J06-0504	H.T	11/29/06					FCJ		sheet 1 of 1 A4		
			dr	11/29/06						type Product Customer Drawing		
			enr	11/29/06						Rev		
			chr	11/29/06						A		
			appd	12/1/06						1		
sheet index	revision sheet	A	1									2




FCconnect.com

Copyright FCJ



RECOMMENDED CABLE (FFC)

n : NO. OF CONDUCTOR

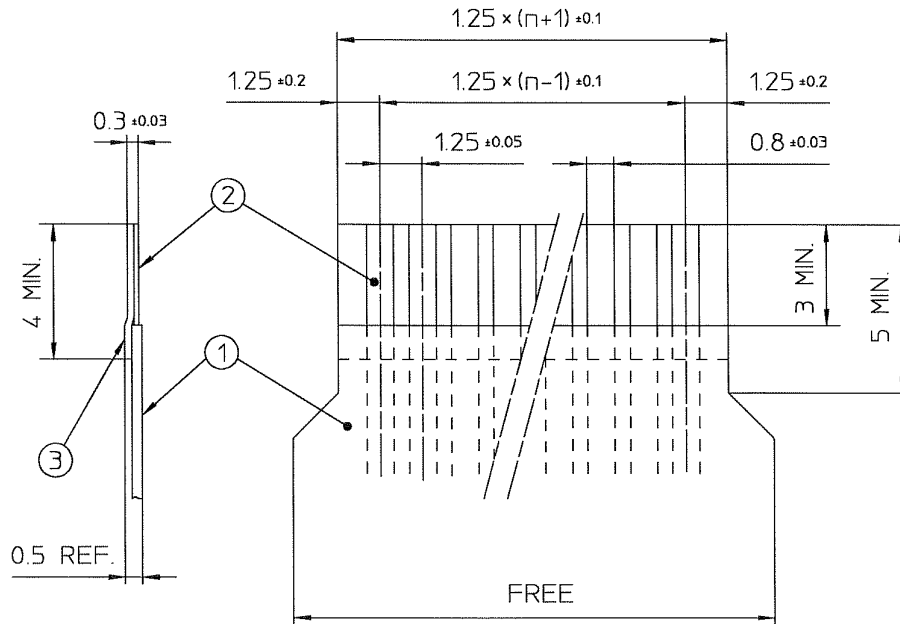

PT. NO.	PARTS NAME	MATERIAL	NOTE
1	INSULATOR	FLAME RESISTING POLYESTER OR EQUAL	_____
2	CONDUCTOR	COPPER FOIL : 50 μm	PLATING : SOLDER 1 μm MIN.
3	SUPPORTING TAPE	FLAME RESISTING POLYESTER OR EQUAL	_____

NOTES.

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection		product family 58KF	
ltr	ecn no	dr	date	tolerances unless otherwise specified				title RECOMMENDED CABLE (Cat. No. SLP_R/S-2_)		sheet 1 of 1 JSA 28249 A4	
3		H.T	11/29/99	angles	linear	scale X					
A	J06-0504	H.T	11/29/06					type Product Customer Drawing		Rev A	
sheet index		revision sheet	A 1								



FCIconnect.com

Copyright FCI

