

This document was generated on 01/24/2011

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:	<u>0712261031</u>
Status:	Obsolete
Description:	1.00mm (.039") Pitch ZIF Receptacle, Vertical, FFC Retent PC Tail Length, without Plastic Polarizing Peg, 10 Circuits

Documents:

Drawing (PDF)

Agency Certification CSA

UL

General

Product Family Series Comments Product Name

Physical

Circuits (Loaded) Color - Resin Contact Position Durability (mating cycles max) Entry Angle Flammability Mated Height Material - Metal Material - Plating Mating Material - Plating Termination Material - Resin Number of Rows Orientation PC Tail Length **PCB** Retention PCB Thickness - Recommended Packaging Type Pitch - Mating Interface Plating min - Mating Plating min - Termination Polarized to PCB Stackable Surface Mount Compatible (SMC) Temperature Range - Operating Termination Interface: Style Wire/Cable Type

Electrical

Current - Maximum per Contact Voltage - Maximum

Solder Process Data Lead-free Process Capability

Material Info

Reference - Drawing Numbers Sales Drawing

LR19980 E29179


FFC/FPC Connectors 71226 Options: Barb, Peg, Color N/A

.00mm (.039") Pitch ZIF Receptacle, Vertical, FFC Retention Barbs, 3.15mm (.124")

10 Natural N/A 5 Vertical 94V-0 6.00mm (.236") Phosphor Bronze Tin Tin High Temperature Thermoplastic Vertical 3.15mm (.124") Yes 2.40mm (.094") Tray 1.00mm (.039") 5.080µm (200µ") 5.080µm (200µ") No No Yes -20°C to +80°C Through Hole FFC/FPC 1A 125V

Wave Capable (TH only)

SD-71226-***1

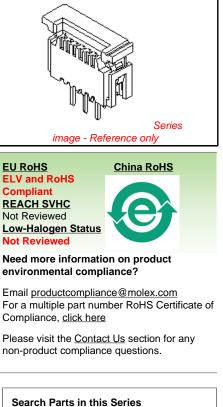

71226Series

This document was generated on 01/24/2011
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION