

# MC 1,5/10-LWL 2,3-3,81

Order No.: 1841190



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1841190>

Fiber optics, Pitch: 3.81 mm, Number of positions: 10, Dimension a: 2.3 mm, Color: transparent

Commercial data	
GTIN (EAN)	4017918111830
sales group	E190
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.003806 KG
Catalog page information	Page 193 (CC-2009)

#### Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

#### Accessories


Item	Designation	Description
<b>General</b>		
1803277	MC 1,5/ 2-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827868	MC 1,5/ 2-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering

1803280	MC 1,5/ 3-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827871	MC 1,5/ 3-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803293	MC 1,5/ 4-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827884	MC 1,5/ 4-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803303	MC 1,5/ 5-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827897	MC 1,5/ 5-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803316	MC 1,5/ 6-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827907	MC 1,5/ 6-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803329	MC 1,5/ 7-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827910	MC 1,5/ 7-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803332	MC 1,5/ 8-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827923	MC 1,5/ 8-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803345	MC 1,5/ 9-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827936	MC 1,5/ 9-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803358	MC 1,5/10-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827949	MC 1,5/10-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803361	MC 1,5/11-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827952	MC 1,5/11-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803374	MC 1,5/12-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827965	MC 1,5/12-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803387	MC 1,5/13-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827978	MC 1,5/13-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering

1803390	MC 1,5/14-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827981	MC 1,5/14-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803400	MC 1,5/15-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1827994	MC 1,5/15-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1803413	MC 1,5/16-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1828003	MC 1,5/16-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1841307	MC 1,5/17-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1848410	MC 1,5/17-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1841297	MC 1,5/18-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1848423	MC 1,5/18-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1841284	MC 1,5/19-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1848436	MC 1,5/19-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1841271	MC 1,5/20-G-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1848449	MC 1,5/20-GF-3,81	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.81 mm, Color: green, Metal surface: Sn, Assembly: Soldering

### Diagrams/Drawings

Dimensioned drawing

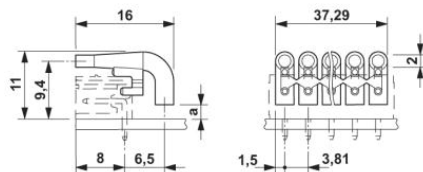

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;