


FCI P/N	ANTEC P/N	CONNECTOR	"L"
84703-002	49504-0002	SC/APC	A/R
84703-004	49504-0004	SC/APC	A/R
84703-006	49504-0006	SC/UPC	A/R
84703-007	49504-0007	SC/UPC	A/R
84703-009	49504-0009	SC/UPC	A/R
84703-010	49504-0010	FC/APC	A/R
84703-011	49504-0011	FC/APC	A/R
84703-014	49504-0014	SC/APC	24±6 INCHES


NOTE: A/R = LENGTH AS RECEIVED.

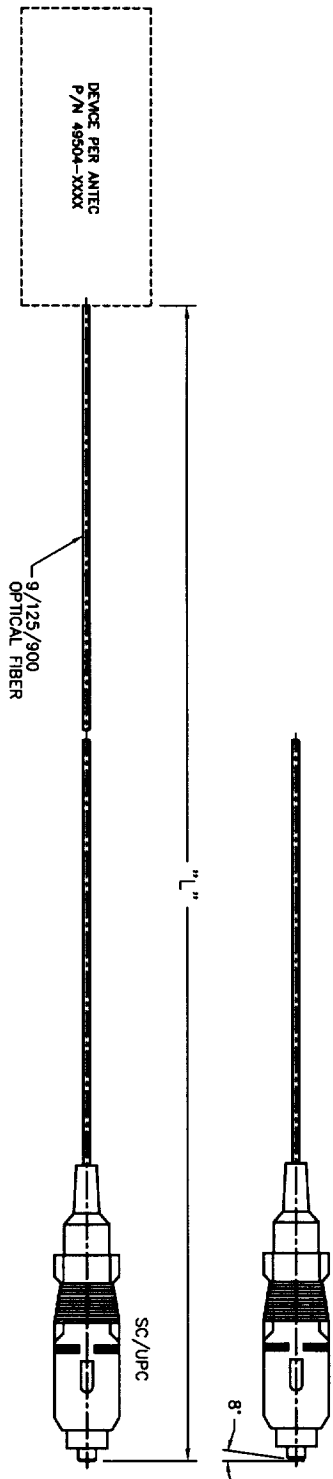

SPECIFICATIONS	
POLISH GEOMETRY:	UPC
RADIUS (mm)	7-25
FIBER EXTENSION (mm)	+50/-120 MAX. (SEE NOTE 1)
APEX OFFSET	≤ 50
INSERTION LOSS TIA/EIA-455-34A	≤ 0.3dB (NOT TESTED IN PIGTAILED CONFIGURATION)
RETURN LOSS TIA/EIA-455-107 OR APPROVED BACKREFLECTION METER	≥ 55dB
	≥ 60dB

NOTE 1: POLISH RADIUS/UNDERCUT RELATIONSHIP PER TELECORDIA GR-326-CORE FIG. 4-7

FCI P/N	DESCRIPTION
84874-001	FC/UPC CONNECTOR
74368-001	SC/UPC CONNECTOR
74367-001	FC/APC CONNECTOR
74369-001	SC/APC CONNECTOR
84710-002	F-123 EPOXY

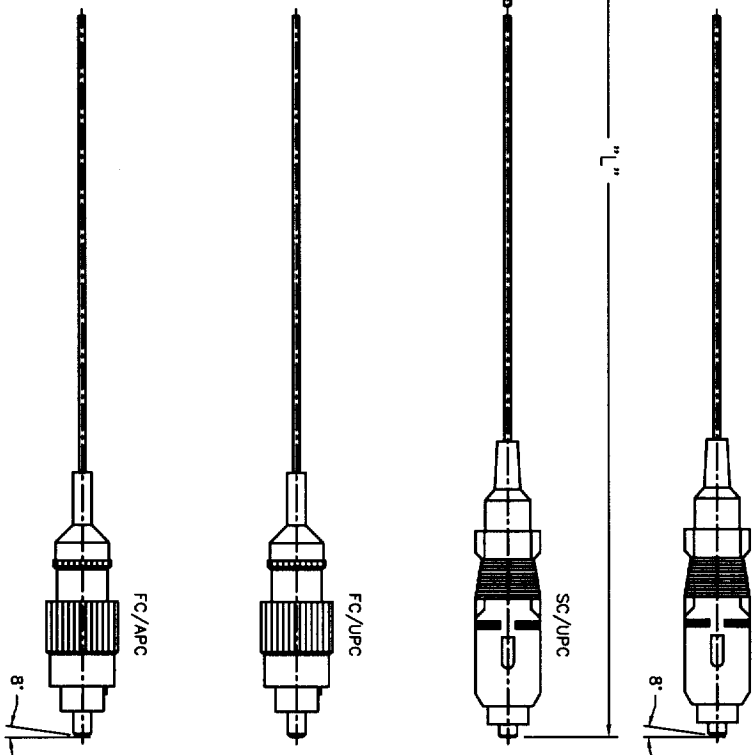

mat'l. code	ecn no	dr	date	tolerances unless otherwise specified	INSPECTION COPY	title	code
A	V00543	RTB	2/11/00	NOMINALS ONLY	projection	OPTICAL CONN. TERM. PER ANTEC 49504	210
B	V01211	RSN	5/15/00	UNLESS NOTED	INCH	product family FIBER OPTICS	1 of 1

ACAD

code code 22526

Electronics
www.fci.com