

Copyright FCI.




FCIconnect.com

FCI P/N SEE NOTE 3
10013867-001LF
10013867-002LF

INTERNAL USE ONLY
NOT AVAILABLE

ATTENUATION		ISOLATION (dB MIN)	WAVELENGTH
LASER (dB) MAX	TYP		
1.0	0.8	30	850
0.8	0.6	30	1300

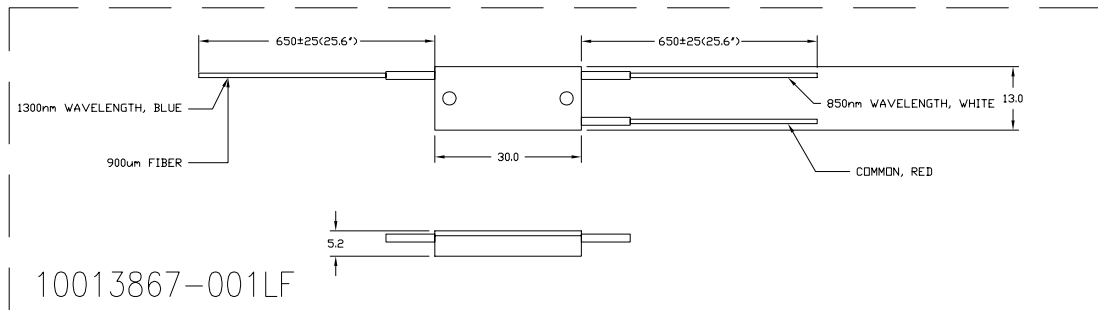

10013867-001LF

1. WDM SPECIFICATIONS:

DIRECTIVITY:

TYPICAL: >55dB

MINIMUM: >45dB

WAVELENGTH BANDPASS (nm):

TYPICAL: 120nm

MINIMUM: 100nm

ISOLATION:

MUX & DEMUX: 30dB MIN (TYP. 42dB)

OPERATING TEMP.: -40°C TO +65°C

STORAGE TEMP.: -40°C TO +65°C

2. ALL FIBERS ARE 62.5 micron FIBERS / 125 micron CASE.

③ THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

"LF" INDICATES THAT THE PRODUCT IS LEAD FREE.

mat'l. code		surface ASME Y14.5		tolerance ASME Y14.5		projection		product family	
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM		FIBER OPTICS	
A	v03-1073	TAB	9/26/03	angles	.X±.3	MM		title	
B	v03-1265	PJ	12/04/03	fil	.XX±.13	scale 1:1		WDM, MM, 62.5	
C	v04-0995	DAI	10/13/04	0±2"	.XXX±.051			sheet 1 of 1	
D	v06-0398	LP	2006/04/24	dr	T. BRUNGARD	9/26/03	FCI		dwg no
				enr	L. CONLIN	9/26/03	10013867		size
				chr	L. CONLIN	9/26/03	CUSTOMER Drawing		A4
				appd	L. CONLIN	9/26/03			
sheet index	revision	D							
	sheet	1							

form: A4mmXLC

PDM: Rev:D

STATUS:Released

Printed: Aug 14, 2008