



DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT IS BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

REV	DATE	DESCRIPTION	BY	APPD
B	3-30	REV. E REORGAN ECN 1091		BF
C	11-29-90	REV. LOC. 5. DIST. AD-4171		JK
D	11-29-90	REV. PER ECN 0010-0187-92		JK
E	11-14-91	REV. PER 0010-0436-95		JK
F	3-28-99	REV. PER 0621-0244-98		JLG
G	3-14-99	REV. PER 0630-0248-99		JLG

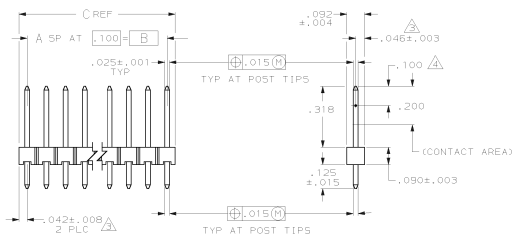

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
 △ POINT OF MEASUREMENT FOR PLATING THICKNESS



LOC	AD	REV	DATE	DESCRIPTION	BY	APPD
3.984	3.900	39	40	4-102976-0		
3.884	3.800	38	39	3-102976-9		
3.784	3.700	37	38	3-102976-8		
3.684	3.600	36	37	3-102976-7		
3.584	3.500	35	36	3-102976-6		
3.484	3.400	34	35	3-102976-5		
3.384	3.300	33	34	3-102976-4		
3.284	3.200	32	33	3-102976-3		
3.184	3.100	31	32	3-102976-2		
3.084	3.000	30	31	3-102976-1		
2.984	2.900	29	30	3-102976-0		
2.884	2.800	28	29	2-102976-9		
2.784	2.700	27	28	2-102976-8		
2.684	2.600	26	27	2-102976-7		
2.584	2.500	25	26	2-102976-6		
2.484	2.400	24	25	2-102976-5		
2.384	2.300	23	24	2-102976-4		
2.284	2.200	22	23	2-102976-3		
2.184	2.100	21	22	2-102976-2		
2.084	2.000	20	21	2-102976-1		
1.984	1.900	19	20	2-102976-0		
1.884	1.800	18	19	1-102976-9		
1.784	1.700	17	18	1-102976-8		
1.684	1.600	16	17	1-102976-7		
1.584	1.500	15	16	1-102976-6		
1.484	1.400	14	15	1-102976-5		
1.384	1.300	13	14	1-102976-4		
1.284	1.200	12	13	1-102976-3		
1.184	1.100	11	12	1-102976-2		
1.084	1.000	10	11	1-102976-1		
.984	.900	9	10	1-102976-0		
.884	.800	8	9	102976-9		
.784	.700	7	8	102976-8		
.684	.600	6	7	102976-7		
.584	.500	5	6	102976-6		
.484	.400	4	5	102976-5		
.384	.300	3	4	102976-4		
.284	.200	2	3	102976-3		
.184	.100	1	2	102976-2		
.084	—	—	1	102976-1		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES (IN) :	DR 10-9-BF P. 1001	AMP INCORPORATED HARRISBURG, PA. 17105
2 PL DEC ± .010 3 PL DEC ± .015 ANGLES ± .5°	CHK 10-12-BF S. CLARK	
MATERIAL: HOUSING: PAH6 FRAME: SENSARY THERMOPLASTIC COLLAR: BRK POSTS: BRASS BRONZE	APPD 10-12-BF E. BLECKER	NAME: HEADER ASSY, MOD 11, BREAKAWAY, SINGLE ROW, .100Q, VERTICAL, WITH .025 SQUARE POSTS
FINISH: POSTS: .000500 MAX ON CONTACT AREA, .000100-.000200 WHITE TIN-LEAD ON SOLDER TAILS, ALL OTHER .000500 RESEAL	APPLICATION SPEC: — WEIGHT: —	SIZE: D FRCH NO: 00779 DRAWING TAG: 102976
		SCALE: 4:1 SHEET: 1 OF 1 CUSTOMER DRAWING