


(2,54mm) .100"

ESW, ESQ SERIES

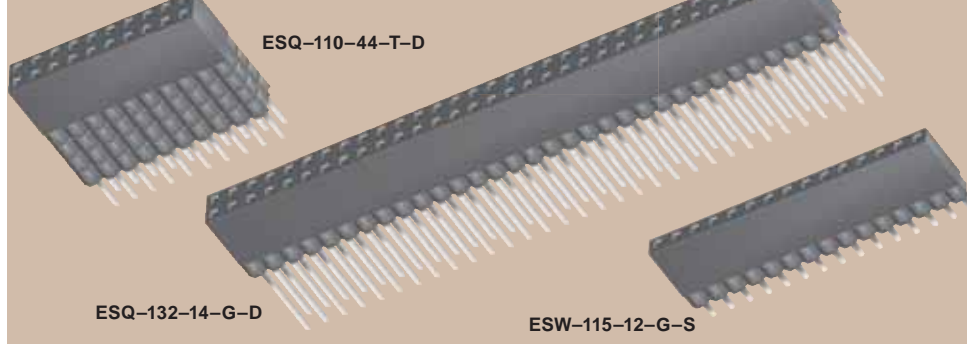

ELEVATED SOCKET

Mates with:
TSW, MTSW, EW, MTLW,
TSS, ZSS,
TSM, DW, ZW, HW

SPECIFICATIONS

For complete specifications see www.samtec.com?ESW or www.samtec.com?ESQ

Insulator Material:
Black Glass Filled Polyester



Contact Material:
Phosphor Bronze



Plating:
Au or Sn over 50µ" (1,27µm) Ni

Voltage Rating:
550 VAC mated with TSW or ESQ

Operating Temp Range:
-55°C to +125°C with Gold
-55°C to +105°C with Tin

Contact Resistance:
10 mΩ max

Insertion Depth:
(3,68mm) .145" to (6,35mm) .250"

Insertion Force:
(Single contact only)
Standard = 6oz (1,67N) avg. (0,64mm) .025" SQ pin);

ESW Low Insertion Force= 3oz (0,83N) avg.

ESQ Low Insertion Force= 3.3oz (0,92N) avg.

Normal Force:
Standard = 125 grams (4,4N)

Withdrawal Force:
(Single contact only)
Standard = 5oz (1,39N) avg. (0,64mm) .025" SQ pin);

ESW Low Insertion Force= 2.6oz (0,72N) avg.

ESQ Low Insertion Force= 2.9oz (0,81N) avg.

Max Cycles:
100 with 10µ" (0,25µm) Au

RoHS Compliant:
Yes

Lead-Free Solderable:
Wave only


Wave only



TYPE STRIP	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION
ESW = Solder Tail				-L = 10µ" (0,25µm) Gold contact, Matte Tin on tail	-S = Single Row	-LL = Locking Lead
ESQ = Square Tail				-G = 20µ" (0,51µm) Gold contact, Gold Flash on Balance	-D = Double Row	
				-T = Matte Tin (N/A w/LIF contact)	-T = Triple Row (ESQ only)	Two leads per strip crimped. N/A with single row 1 or 2 positions.
						"XXX" = Polarized

CURRENT RATING	
AMBIENT TEMP	ESW mated with TSW
20°C	6.9A
40°C	6.0A
60°C	5.3A
95°C	3.5A

6 POSITIONS (2x3) POWERED

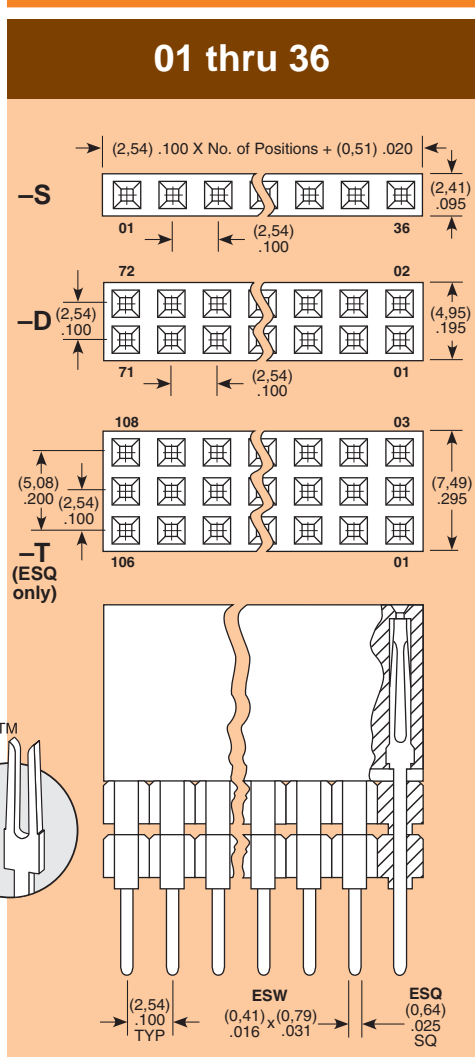

Note: Other Gold plating options available. Contact Samtec.
Note: Some lengths, styles and options are non-standard, non-returnable.

Specify LEAD STYLE from chart below.

STANDARD INSERTION FORCE	LOW INSERTION FORCE	A	B
- 12	- 37	(2,29) .090	(11,05) .435
- 13	- 38	(7,36) .290	
- 23	- 48	(4,83) .190	(13,59) .535
- 33	- 58	(2,29) .090	(16,13) .635
- 14	- 39	(12,19) .480	(11,05) .435
- 24	- 49	(9,65) .380	(13,59) .535
- 34	- 59	(7,11) .280	(16,13) .635
- 44	- 69	(4,57) .180	(18,67) .735

APPLICATIONS

Self Nesting Sockets

PC/104 J1/P1 "Stackthrough" Connectors	
Standard Insertion Force	ESQ-132-14-G-D
Low Insertion Force	ESQ-132-39-G-D
PC/104 J1 "Non-Stackthrough" Connectors	
Standard Insertion Force	ESQ-132-12-G-D
Low Insertion Force	ESQ-132-37-G-D
PC/104 J2/P2 "Stackthrough" Connectors	
Standard Insertion Force	ESQ-120-14-G-D
Low Insertion Force	ESQ-120-39-G-D

PC/104 is a trademark of the PC/104 Consortium.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329 SAMTEC UK • Tel: 44 01236 739292
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103766
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 SAMTEC ANZ • Tel: 613 9512 7747