



MICTOR Connectors (Continued)



Right Angle Receptacles

Related Product Data:

- Material and Finish — page 131
- Performance Characteristics — page 131
- Mating Plugs — pages 133-135, 138
- Application Tooling — page 140

Technical Documents

- Product Specification 108-1422
- Application Specification 114 11004

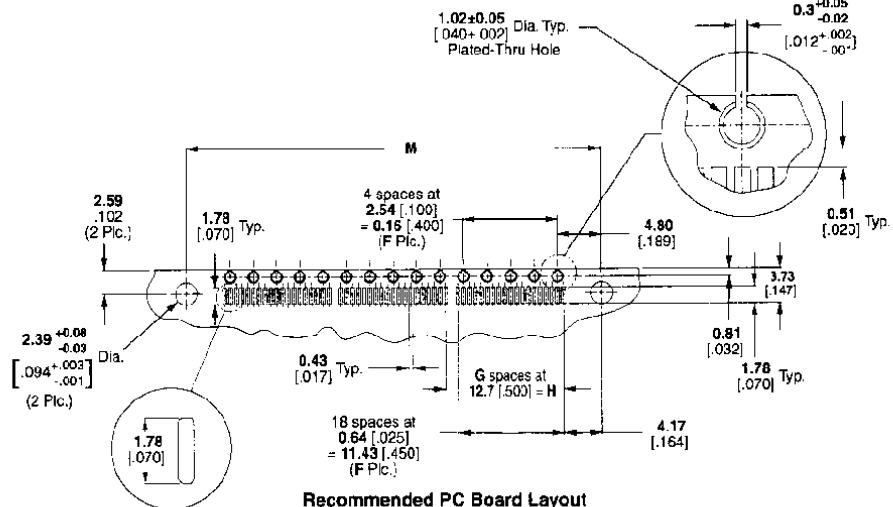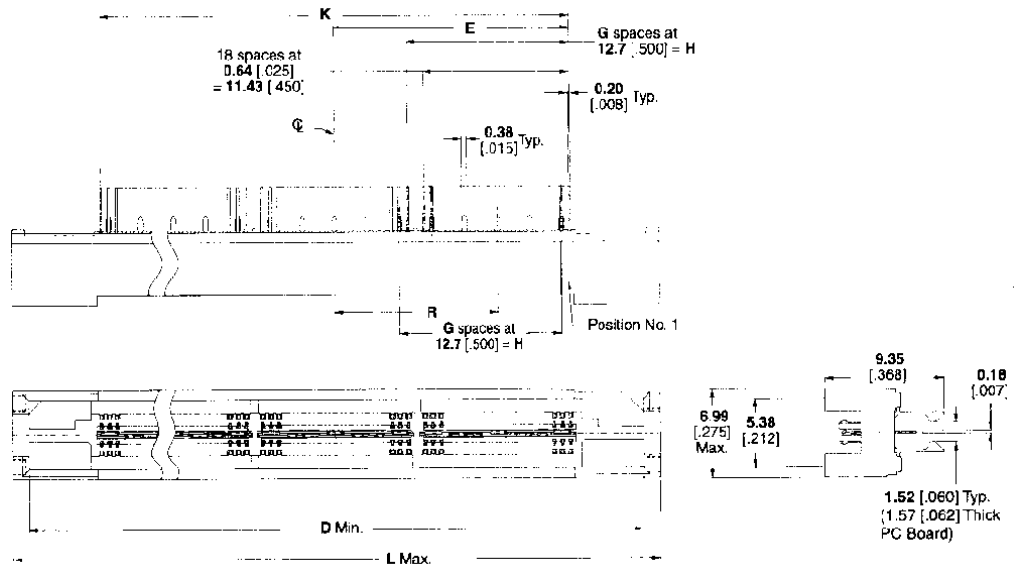

Recommended PC Board Layout
(Mirror image on opposite side)
PC Board Thickness: 1.57 [0.062]

No. of Positions	Dimensions									Part Numbers (Palladium-Nickel Plating)
	D	E	F	G	H	K	L	M	R	
38	22.86 .900	5.72 .225	1	0	—	11.43 .450	25.48 1.003	19.76 .778	—	767044-1
76	35.56 1.400	12.06 .475	2	1	12.70 .500	24.13 .950	38.18 1.503	32.46 1.278	6.35 .250	767044-2
114	48.26 1.900	18.42 .725	3	2	25.40 1.000	36.83 1.450	50.88 2.003	45.42 1.778	12.70 .500	767044-3
152	60.96 2.400	24.76 .975	4	3	38.10 1.500	49.53 1.950	63.58 2.503	57.86 2.278	19.05 .750	767044-4
190	73.66 2.900	31.12 1.225	5	4	50.80 2.000	62.23 2.450	76.28 3.003	70.56 2.778	25.40 1.000	767044-5
228	86.36 3.400	37.46 1.475	6	5	63.50 2.500	74.93 2.950	88.98 3.503	83.26 3.278	31.75 1.250	767044-6
266	99.06 3.900	43.82 1.725	7	6	76.20 3.000	87.63 3.450	101.69 4.003	95.96 3.778	38.10 1.500	767044-7