



THIS DRAWING IS UNPUBLISHED. REPRODUCTION IS PROHIBITED. BY THE ELECTRONIC CORPORATION. ALL RIGHTS RESERVED.


REV	DATE	DESCRIPTION	BY	CHK	APP
GP 00		RELEASED PER EC 0511-0842-04	14MAY95	BM	WM

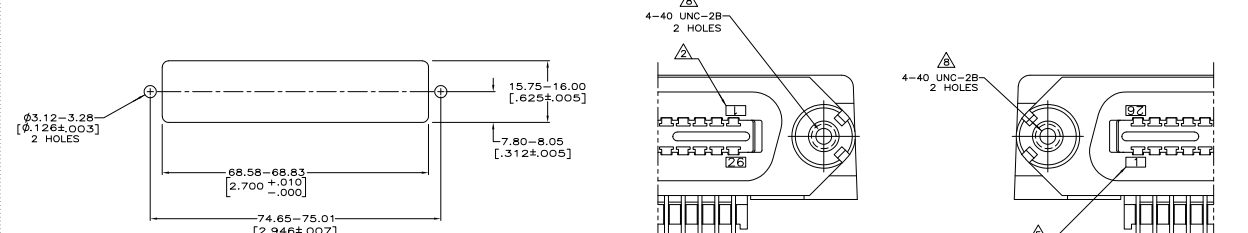

- △ MATERIAL: HOUSING, BRACKET, PLATE AND COMB - THERMOPLASTIC, BLACK, 94V-0 RATED. TERMINALS-TAILS - TIN OVER NICKEL PLATED HIGH STRENGTH COPPER ALLOY. MATING SURFACE - LOCALIZED GOLD OVER NICKEL PLATED HIGH STRENGTH COPPER ALLOY. THREADED INSERT - #4-40 UNC, BRIGHT ZINC PLATED BRASS.
- △ TERMINAL 1 IS LOCATED IN THIS ROW FOR STANDARD ORIENTATION, 5552725-1, -2 AND -5.
- △ TERMINAL SUPPORT PLATE CLEARANCE FOR TERMINAL STRAIN RELIEF AND FLUX REMOVAL.
- △ MAXIMUM PANEL THICKNESS: 1.57[.062].
- △ TERMINAL 1 IS LOCATED IN THIS ROW FOR REVERSE ORIENTATION, 5552725-3 AND -6 ONLY.
- △ DETAILS "A" AND "B" ARE VIEWED FROM MATING SIDE OF RECEPTACLE ASSEMBLY.
- △ FOR USE WITH A NO.4 BT TYPE SELF-TAPPING SCREW.
- △ 5552725-1, -2 AND -3 ARE TAPPED 4-40; -5 AND -6 USE 4-40 THREADED INSERTS.
- △ INSERT SHALL WITHSTAND 8 INCH-POUNDS OF TORQUE WITHOUT CRACKING HOUSING OR LOOSENING.

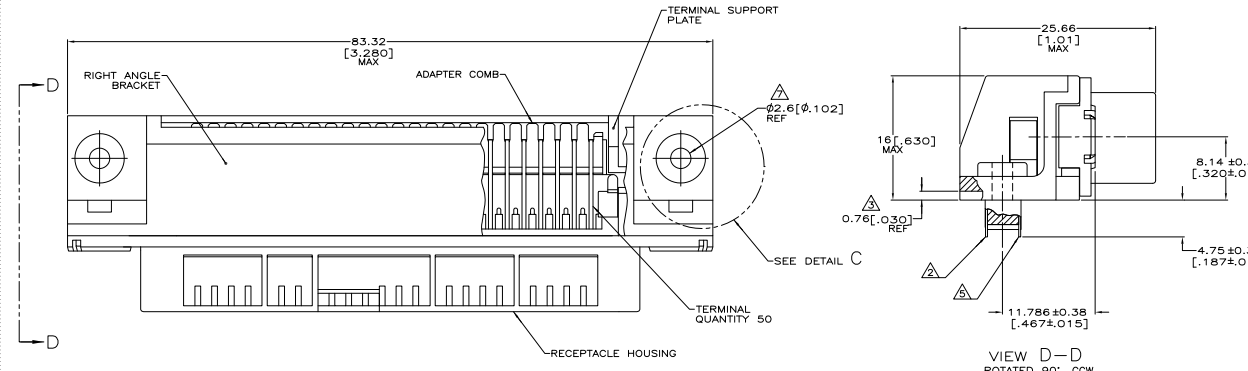

VIEW D-D ROTATED 90° CCW

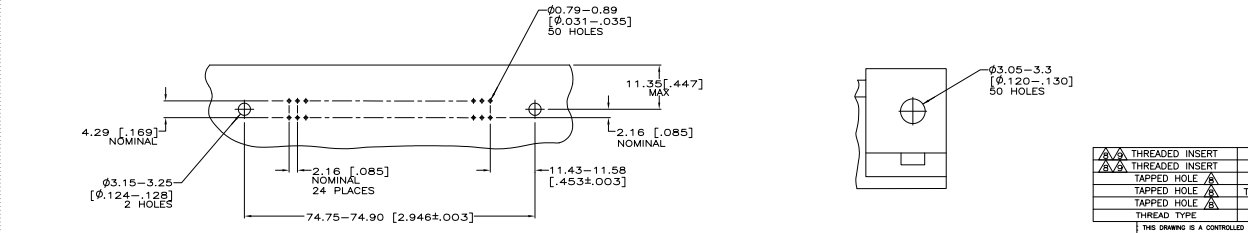

DETAIL C (THRU-BOLT)

THREADED INSERT	TYPE OF MOUNTING	DESCRIPTION	PART NUMBER
△ THREADED INSERT	△ SELF-TAPPING	SEE DETAIL B	5552725-6
△ THREADED INSERT	△ SELF-TAPPING	SEE DETAIL A	5552725-5
△ TAPPED HOLE	△ SELF-TAPPING	SEE DETAIL B	5552725-3
△ TAPPED HOLE	△ THRU-BOLT(SEE DETAIL C)	SEE DETAIL A	5552725-2
△ TAPPED HOLE	△ SELF-TAPPING	SEE DETAIL A	5552725-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV. 1	DATE 12/11/91	BY	DESIGNED BY	DATE	CHKD BY	DATE	APPROVED BY	DATE	
INCHES	1:1	1	12/11/91	BM	WM	12/11/91					
MILLIMETERS	25.4	1	12/11/91								
TOLERANCES UNLESS OTHERWISE SPECIFIED:											
FRACTIONS	DECIMALS										
FRACTIONS	DECIMALS										
FRACTIONS	DECIMALS										
FRACTIONS	DECIMALS										
TITLES		DATE	DATE	ISSUED BY	DATE	REVISED BY	DATE	REVISED BY	DATE	REVISED BY	DATE
CUSTOMER DRAWING		12/11/91	12/11/91	BM	12/11/91	WM	12/11/91				