

# FIREWIRE INTERFACES FSB-06 SERIES

## SPECIFICATIONS

For complete specifications and recommended PCB layouts see [www.samtec.com?FSB-06](http://www.samtec.com?FSB-06)

**Insulator Material:**

High Temperature Thermoplastic

**Contact Material:**

Phosphor Bronze

**Shell Material:**

Copper Alloy

**Plating:**

Gold on Contacts, Nickel on Shell, Tin on Tails

**Operating Temp Range:**

-55°C to +105°C

**Current Rating:**

1 A per contact

**Voltage Rating:**

30 VAC

**Contact Resistance:**

30 mΩ max

**Minimum Cycles:**



1500

**Packaging:**

Packaged and shipped in Bulk Packaging Trays; Trays suitable for automation are available upon request.

**RoHS Compliant:**

Yes

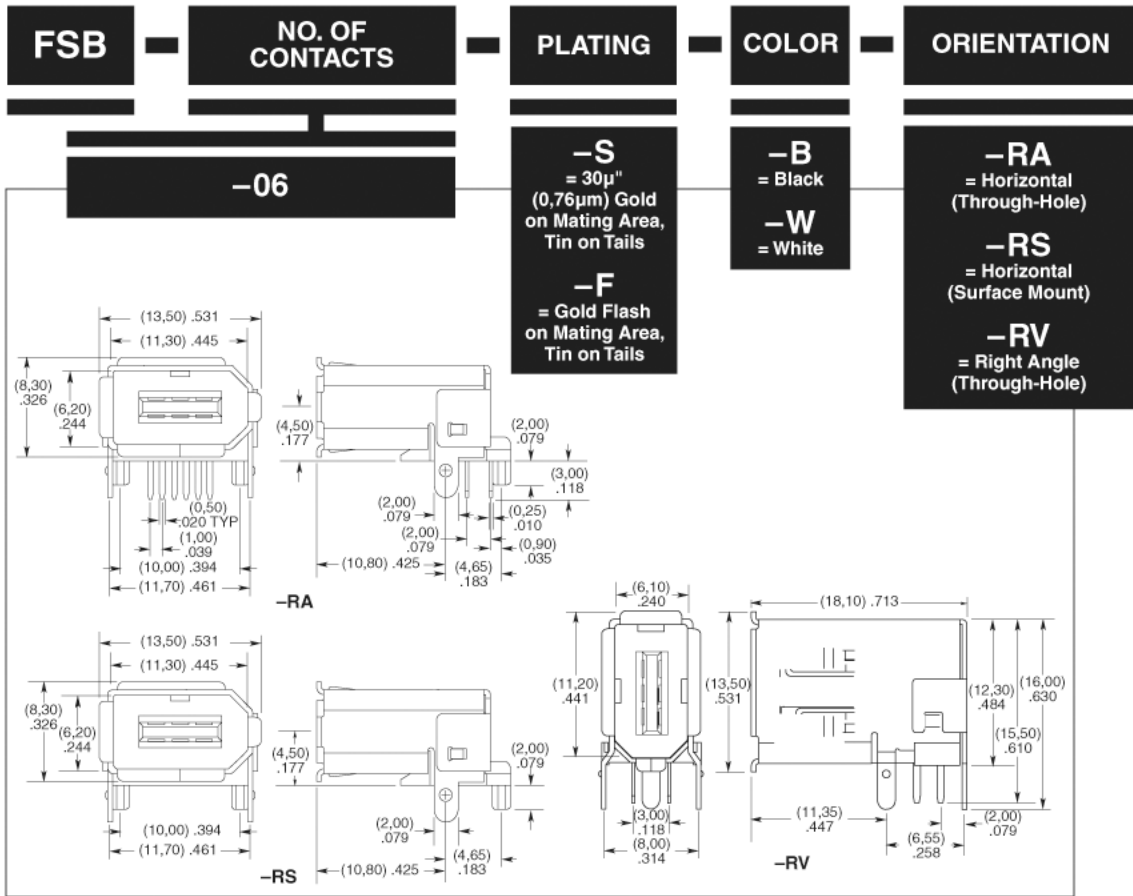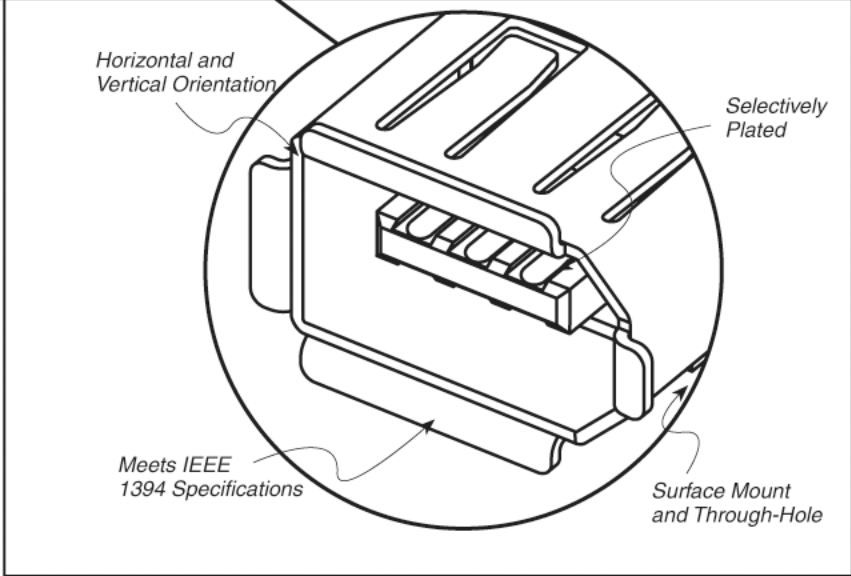

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047  
 SAMTEC GERMANY • Tel: +49 (0) 89/89460-0 • Fax: +49 (0) 89/89460-299  
 SAMTEC SCANDINAVIA • Tel: +46-84477280 • Fax: +46-87420413  
 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502  
 SAMTEC SINGAPORE • Tel: 65 6745-5955 • Fax: 65 6841-1502  
 SAMTEC JAPAN • Tel: 045-475-1385 • Fax: 045-475-1340  
 SAMTEC KOREA • Tel: 82-31-717-5685 • Fax: 82-31-717-5681  
 SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520  
 SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61  
 SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690  
 SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-53854047  
 SAMTEC SOUTH AFRICA • Tel: 27 11 4528112 • Fax: 27 86 6714432  
 SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113  
 SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315  
 SAMTEC INDIA • Tel: 91 80 306 21 612 • Fax: 91 80 4152 8187  
 SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 8698-2159  
 SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745