

IEEE 1394 CONNECTORS

PRODUCT BULLETIN 530

IEEE 1394 Firewire Connectors

Switchcraft introduces both right angle PC and surface mount versions of IEEE 1394 Firewire connectors. The Firewire connectors are becoming another connector standard used in the upcoming multimedia/computer market. The connectors meet IEEE 1394R-4006N Series standards.

Features and Benefits

- Shielded housings to reduce EMI/RFI emissions
- Mounting posts add stability for wave soldering
- Low profile requires less space



Markets

- Multimedia
- Video
- Personal Computers
- Computer Peripherals

Specifications

General

Voltage Rating: 40 VAC
Current Rating: 1.5A
Contact Resistance: 30m Ohms Max.
Temperature Rating: -55°C to +105°C
Insertion Force: 6.0 lbs. Max.
Withdrawal Force: 4.4 lbs. Min.
Lifecycles: 1,500 Min.

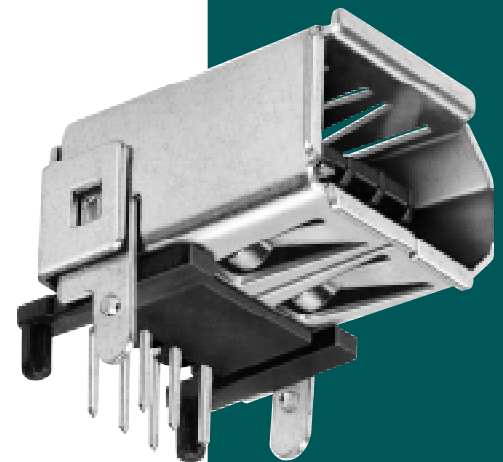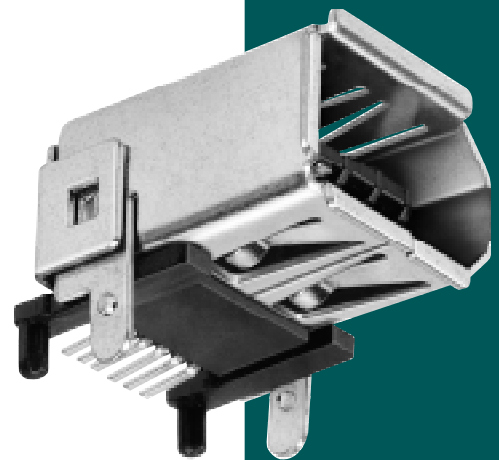

Part Number	Description
1394RAPC	IEEE 1394 RAPT
1394SMT	IEEE 1394 SMT

Switchcraft®
w w w . s w i t c h c r a f t . c o m