


Inner Ferrule on Jacket

No. of Positions	Cable Diameter (Less Than)
24	.300 7.62
36	.350 8.89
50	.400 10.16

Inner Ferrule on Braid*

No. of Positions	Cable Diameter (Greater Than)
24	.300 7.62
36	.350 8.89
50	.400 10.16

* Ferrule size based on braid bundle diameter.

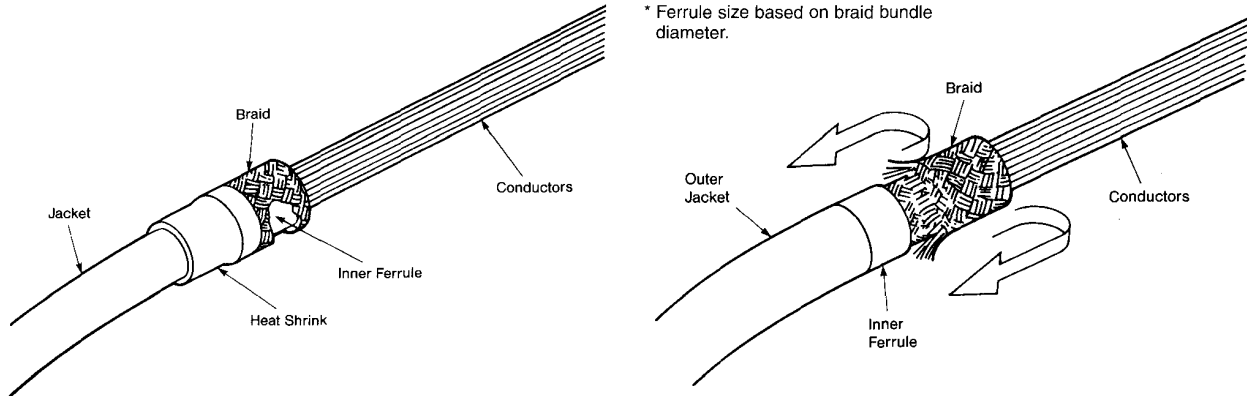

No. of Positions	Cable Range	Part Numbers						
		Shielded Plug Kit		Shielded Receptacle Kit		Cover Kits		
		Screw Lock		Bail Lock				
		B Slot	E Slot	B Slot	E Slot	B Slot	E Slot	
24	.250-500 6.35-12.70	554948-4 ⁵ 554948-2 ⁴	554948-3 ³	—	—	—	—	554944-1
36	.250-500 6.35-12.70	554951-2	—	554950-2	554950-1	—	—	554945-1
50	.350-625 8.89-15.88	554945-2 ⁶	554954-1	554953-2 ¹	554953-1 ¹	554955-2	554955-1	554946-1 ² 554946-2

¹ SCSI applicable.
² For cable diameter of .500 [12.70] or less use -1 kit. For cable diameter greater than .500 [12.70] use -2 kit.
³ Connector with M3.5 threads kits includes M3.5 x 2.00 [50.80] standoff stud.
⁴ 4-40 UNC-2B hole size.
⁵ M3.5 x 0.6-6G, shoulder stud screws (2) supplied.
⁶ Contact Tyco Electronics for RoHS Part Number information.

Typical Cable Assembly (Shielding Effectiveness)

