


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	0G3B-0317-03	24APR03	TK	GS

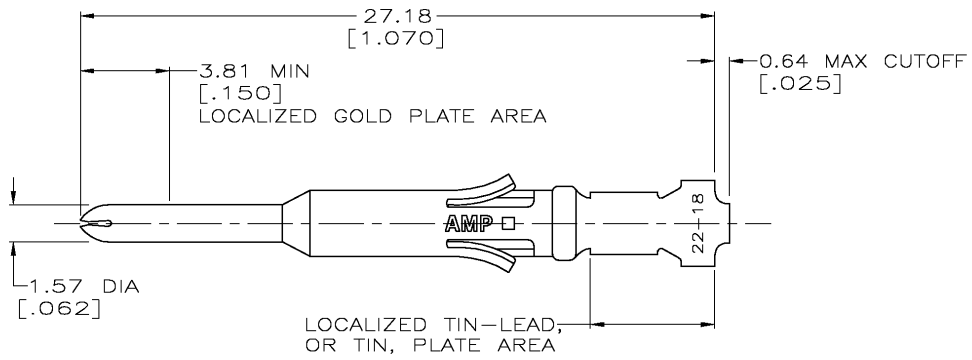

1. WIRE RANGE 22-18 AWG.
2. INSULATION RANGE 1.27-2.79 [.050-.110] DIA.
- ⚠ 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27 μm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA, BOTH OVER 1.27 μm [.000050] MIN NICKEL.
- ⚠ TIN PLATED.
- ⚠ GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727 AND NICKEL PER QQ-N-290.
- ⚠ 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27 μm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μm [.000050] MIN NICKEL.

66581-7	⚠6	66591-4
66581-4	⚠3	66591-2
66581-2	⚠4	66591-1
STRIP REF	FINISH	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	Tyco Electronics Corporation Harrisburg, Pa	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK R.STONE 06/22/94	APVD G.STEINHAUER 06/27/94	
0 PLC ± -	1 PLC ± -	NAME CONTACT, PIN, LOOSE PIECE, TYPE VI, MULTIMATE		
2 PLC ± 0.13 [.005]	3 PLC ± -	PRODUCT SPEC		
4 PLC ± -	4 PLC ± -	APPLICATION SPEC		
MATERIAL BRS PER MIL-C-50	FINISH ⚠5 SEE TABLE	WEIGHT	SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING		DRAWING NO C-66591	RESTRICTED TO	
		SCALE 6:1	SHEET 1 OF 1	REV F