Multimate Contacts

Electronics

Type VI Contacts


Contact size — 16
Pin diameter — .062 (1.57)
Test current — 13 amperes*
Material — Copper alloy

Contact Finish:

A — Tin

B — Gold flash over .000050 [0.00127] nickel on entire contact with .000030 [0.00076] selective gold plating on contact area

*Note: Current carrying capability depends on wire size, connector size and ambient temperature.

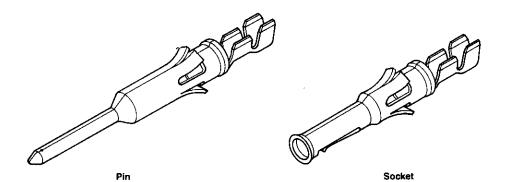

| Wire Size Range' | | Ins. Dia. | Contact Finish | Contact Part Number (reeled for AMP Standard Applicator) | | Contact Part Numbers (reeled for AMP Quick-Change Applicator) | | Loose Piece Contact Part No. | | Tooling Part Numbers |
|---------------------|-----------|-----------------------------------|-------------------|--|---------|---|---------|---------------------------------|---------|-------------------------|
| AWG | [mm²] | Range | | Pin | Socket | Pin | Socket | Pin | Socket | Hand Tool |
| 28-26 | 0.08-0.15 | .035055 0.89-1.4 | Α | 66585-1 | _ | 66585-2 | _ | | _ | 91515-1 58495-1³ |
| | | | В | _ | _ | 66585-4 | 66586-4 | 66595-2 | 66596-2 | |
| 24-20 | 0.2-0.6 | .040080 1.02-2.03 | Α | 66583-1 | 66584-1 | 66583-2 | 66584-2 | 66593-1 | 66594-1 | 91515-1 58495-1³ |
| | | | В | _ | _ | 66583-4 | 66584-4 | 66593-2 | 66594-2 | |
| 22-18 | 0.3-0.9 | .055110 1.40-2.79 | Α | 66581-1 | 66582-1 | 66581-2 | 66582-2 | 66591-1 | 66592-1 | 90327-1 |
| | | | В | _ | _ | 66581-4 | 66582-4 | 66591-2 | 66592-2 | |
| 18-16 | 0.8-1.4 | .080100 2.03-2.54 | Α | 66579-1 | 66580-1 | 66579-2 | 66580-2 | 66589-1 | 66590-1 | 91515-1 58495-1³ |
| | | | В | _ | | 66579-4 | 66580-4 | 66589-2 | 66590-2 | |
| 14 | 2 | .080135 ² 2.03-3.43 | Α | 66577-1 | 66578-1 | 66577-2 | 66578-2 | 66587-1 | | 91550-1 |
| | | | В | | | 66577-4 | 66578-4 | 66587-2 | 66588-2 | |

Extraction Tool Part Number 305183.

Applicator Nos. for Terminating Machines

| Wire S | ize Range | Model K | Model T | Model G | Model | |
|--------|-----------|--|-------------|----------|------------------|--|
| AWG | mm² | Model K | Model | Model G | Stripper/Crimper | |
| 28-26 | 0.08-0.15 | 466321-4 | 466321-3 | 466321-6 | 466908-2 | |
| 24-20 | 0.2-0.6 | 466323-4 | 466323-3 | _ | 466907-2 | |
| 22-18 | 0.3-0.9 | 466384-4 | 466384-3 | _ | 466914-1 | |
| 18-16 | 0.8-1.4 | 466325-2 | 466325-1 | 466325-5 | _ | |
| 14 | 2 | 687997-2 ⁴ 687997-4 ⁴ | | _ | _ | |

Insulation Dia. Range—Part Number 687997-2, .080-.105 [2.03-2.67]; Part Number 687997-4, .105-.135 [2.67-3.43].

Pin and Socket Connectors

²Maximum insulation diameter recommended for "G" Series connectors with Multimate contact cavities is .110 [2.79].

³Economy Hand Tool for field repair only.

Insertion Tool Part Number 91002-1 for insulation diameters .070 [1.78] or less.