

Wire to Board Connectors

Dynamic Series Connectors/D-2000 Series


D-2 Contact and Application Tooling

■Crimp Type

(Gold plating : 0.38µm)

Receptacle Contact

(Used on Receptacle Housing)



Tab Contact

(Used on Tab Housing)

Wire Range		Wire Ins. Diameter	Wire Range Mark	Contact Part Number		Application Tooling Part Number	
AWG	mm ²			Receptacle Contact	Tab Contact	Mini-Applicator	Hand Tool
28	0.08	0.88~1.5	S	ST.	1318106-1	1318110-1	1385232-2
26	0.12			LP.	1318108-1	1318112-1	91576-1
24	0.20	1.11~1.87	M	ST.	1318105-1	1318109-1	1385231-2
22	0.30			LP.	1318107-1	1318111-1	91595-1
20	0.50						
18	0.85						

Note :

- *Minimum order quality is provided. When ordering, specify your requirements by multiplying the quality. (The figures for Strip Form Contacts denote one-reel's quantities.)
- *Minimum order quality for tooling is one.

- *Mini Applicators are for use with automachines. (For more information, contact our Sales Department.)
- *Strip Form contacts are for use with Mini Applicators (automachines) and Loose-Piece contacts are for Hand tools.

Application Tooling

■Entry Level Terminator


(Bench-type Terminator)

- ELT is a compact, low-priced bench terminator.
 - ELT uses a direct-drive DC motor, ensuring low noise and easy adjustment of the motor speed.
 - A range of options for varied terminating work are available, providing an excellent working environment where anyone can perform terminating work.
 - Dimensions : 512mm(W)×415mm(D)×510mm(H) With safety cover closed and side-feed applicator mounted (without terminal reel)
 - Weight : Approx. 70kg (terminator unit)
 - Crimping height adjustment feature : Standard (Adjustable over a range of ±0.25mm in increments of 0.013mm)
 - Crimping capacity : 13345N (1360kgf) ; crimping with wires up to AWG#14
- Part Number :**
1338600-3 (with safety cover & safety switch)
1338600-4 (without safety cover & safety switch)




■Hand Tool

The crimping section incorporates Straight Action construction for improved reliability as with automachine.

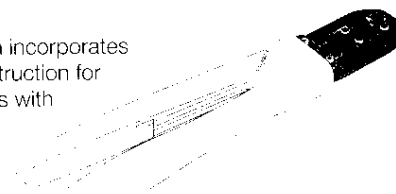

Part No. :
See the chart
Minimum order quantity : 1



Mini-Applicator
Part Number : See the chart
Minimum order quantity : 1