

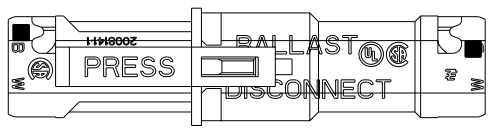
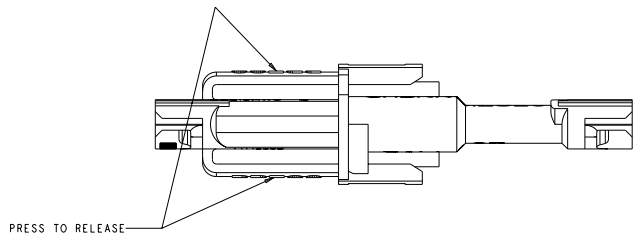


REVISOR		REVISIONS			
REV	DATE	DESCRIPTION	BY	CHK	APP
A		RELEASED PER ECO-07-025460	BT	MM	JJK

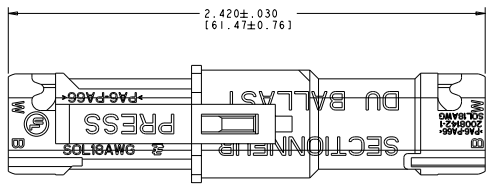


∅ .595 ± .010
 [15.11 ± 0.25]




ACCEPTS 18 AWG SOLID WIRE
 WITH .086 (2.18) MAX INSULATION DIAMETER
 BOTH CONNECTORS


- △ MATERIAL:
 HOUSINGS: POLYAMIDE, COLOR: NATURAL
 CONTACTS: PHOSPHOR BRONZE
 INK: BLACK
- △ FINISH:
 CONTACTS: TIN PLATED
- 3. SEE INSTRUCTION SHEET 408-10153
- △ THIS PRODUCT HAS NOT COMPLETED
 VALIDATION TESTING.



RECOMMENDED WIRE STRIP LENGTH



PLUG CONNECTOR ASSEMBLY



RECEPTACLE CONNECTOR ASSEMBLY

2008144-1
 PART
 NUMBER

TWIN ELECTRONICS CORPORATION 18 (mm)		233P2007		Twin Electronics Harrisburg, PA 17105-3600	
ASSEMBLY, MATED PAIR, 2 POSITION PLUG AND RECEPTACLE PT. LIGHT W-LOCK		233P2007		ASSEMBLY, MATED PAIR, 2 POSITION PLUG AND RECEPTACLE PT. LIGHT W-LOCK	
CUSTOMER DRAWING		A		00779 © 2008144	