




**SMA Connectors (Continued)**  
**Panel Mount, Straight Terminal**

**Bulkhead Feedthrough Jack Receptacle**

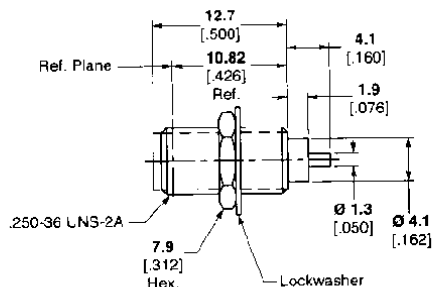



Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	Epoxy	-(60-fGHz)	-65 to 125° C	2058-5029-02	1053222-1

**2 Hole Flange Mount Right Angle Jack Receptacle**

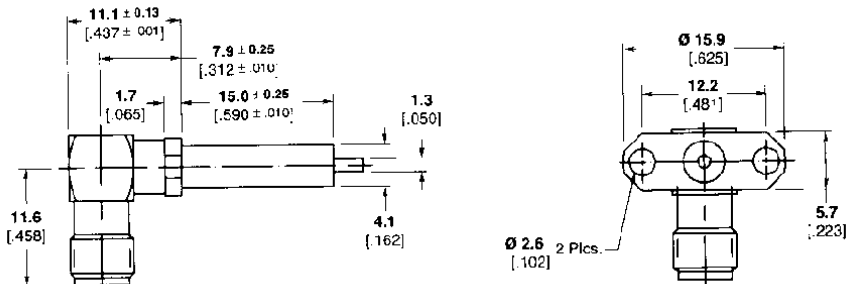

Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	Mechanical	-(90-fGHz)	-65 to 165° C	2054-1241-02	1052986-1

**4 Hole Flange Mount Right Angle Jack Receptacle**

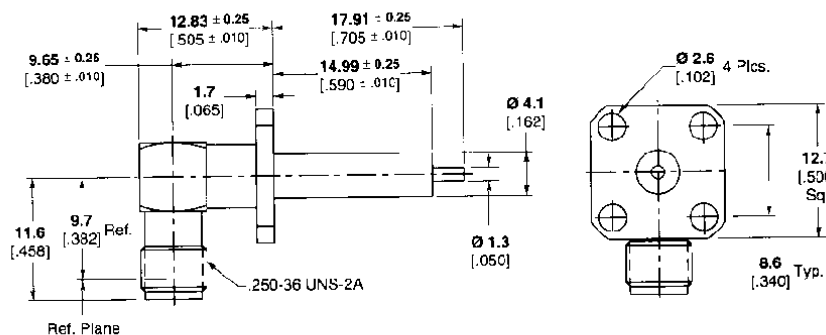

Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	Mechanical	-(90-fGHz)	-65 to 165° C	2054-1201-02	1052978-1
Stainless, Passivated	Mechanical	-(90-fGHz)	-65 to 165° C	2054-1231-02	1052982-1