
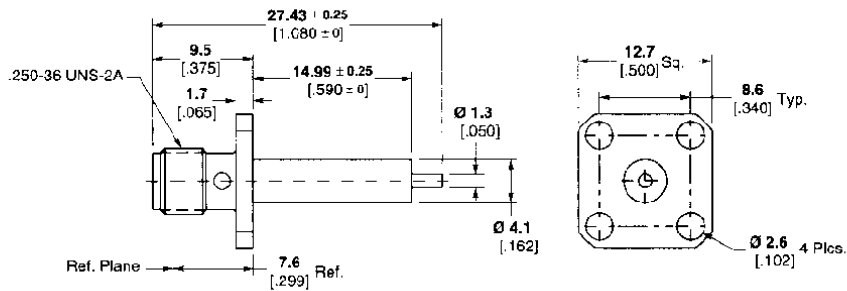




**SMA Connectors (Continued)**  
**Panel Mount, Straight Terminal**

**4 Hole Flange Mount Jack Receptacle**




Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	None	-(100-fGHz)	-65 to 165° C	2052-1200-02	1052518-1
Stainless, Passivated	Epoxy	-(60-fGHz)	-65 to 125° C	2052-1201-02	1052523-1
Stainless, Gold	Epoxy	-(60-fGHz)	-65 to 125° C	2052-1201-00	1052522-1

**2 Hole Flange Mount Plug Receptacle**

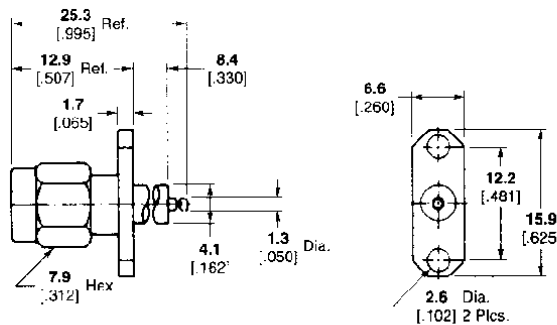

Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	Epoxy	-(60-fGHz)	-65 to 125° C	2051-1352-02	1052349-1

**2 Hole Flange Mount Jack Receptacle**

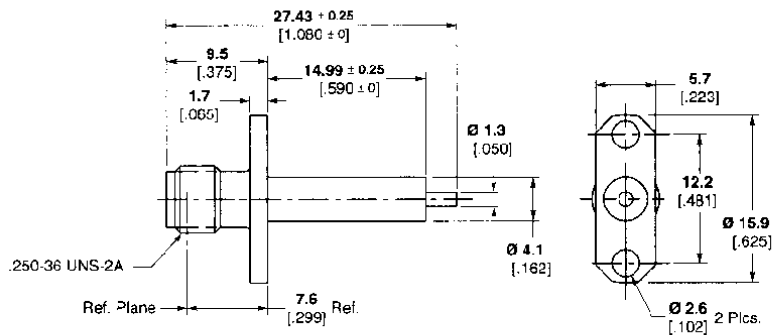

Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	None	-(100-fGHz)	-65 to 165° C	2052-1351-02	1052548-1
Stainless, Passivated	Epoxy	-(60-fGHz)	-65 to 125° C	2052-1352-02	1052552-1