




SEE DRAWING IF DIMENSIONS: UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN MILLIMETERS
 © GEORGE P. TROTT ELECTRONICS CORPORATION, ALL RIGHTS RESERVED



REV	DATE	REVISIONS
AJ	16	
A		REVISED PER EC 0514-0150-05

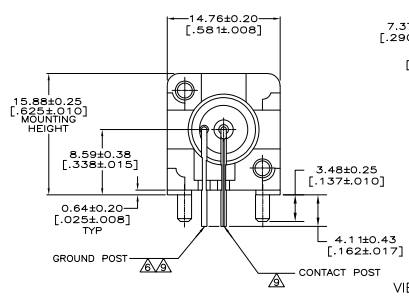


VIEW C
(SAME AS VIEW A EXCEPT AS SHOWN)




VIEW A

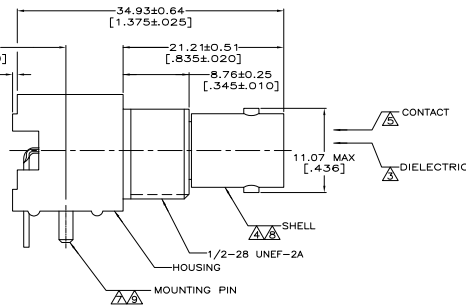

RECOMMENDED PANEL CUTOUT

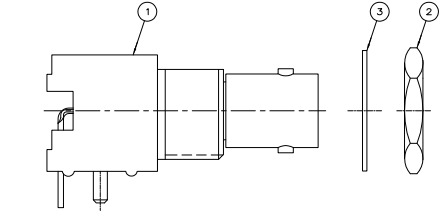

VIEW B



PCB CONFIGURATION

-	-	B	1-329632-2	1-329631-2	5227161-9	1-5227161-7
-	-	B	1-329632-2	1-329631-2	5227161-6	1-5227161-6
△	△	C	-	-	-	1-5227161-5
△	△	C	-	-	-	5227161-9
△	△	C	-	-	-	5227161-7
△	△	A	-	-	-	5227161-6
△	△	A	-	-	-	5227161-3
△	△	A	-	-	-	5227161-2
△	△	A	-	-	-	5227161-1
CONTACT FINISH	HOUSING MATERIAL	VIEW ③	LOCKWASHER	② JAM NUT QTY=1	① ASSEMBLY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. IN VANCELA CONTROL SYSTEMS CORPORATION. GEORGE P. TROTT ELECTRONICS CORPORATION. HARRISBURG, PA 17105-3008.

DESIGNED BY: J. W. BISHOP. CHECKED BY: J. W. BISHOP. DATE: 108-12078. REV: 1. USE DATE PREVIOUS IF ANY. DRAWING NO: A100779. PART NO: 5227161. RETWORK TO: NONE. DATE: 4.1. SHEET: 1 OF 1. REV: A.

- △ POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:WHITE
- △ POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:BLACK
- △ POLYMETHYLENE, GENERAL PURPOSE.
- △ ZINC PER QQ-Z-363.
- △ PHOSPHOR BRONZE PER QQ-B-750.
- △ BRASS PER ASTM-B-453.
- △ BRASS PER ASTM-B-16.
- △ NICKEL PLATE PER QQ-N-290, 3.81 μm [0.00150] MINIMUM THICK.
- △ TIN PLATE PER ASTM-B-545, 3.81 μm [0.00150] MINIMUM THICK.
- △ GOLD PLATE PER MIL-G-45204, 0.76 μm [0.00030] MINIMUM THICK.
- △ GOLD PLATE PER MIL-G-45204, 1.27 μm [0.00050] MINIMUM THICK.
- 12. SEE INSTRUCTION SHEET 408-2769.