






1 | 2

3

4

- NOTES:
1. MATERIAL: HIGH TEMPERATURE THERMOPLASTIC UL 94V-0  
COLOR: BLACK
  2. FINISH: SOLDER TAB: BRASS  
CONTACT: GOLD PLATING ON CONTACT AREA  
100m" MIN. MATT TIN PLATING ON SOLDER TAILS  
50m" MIN. NICKEL UNDERPLATING OVER ALL
  3. THE HOUSING WILL WITHSTAND EXPOSURE TO 260C PEAK TEMP FOR 10 SEC. IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
  4. PRODUCT SPEC: GS-12-450  
PACKING SPEC: GS-14-1169
  5. PRODUCT NUMBERING  
10077334 - X X 505 LF - LEAD FREE

- 0: T&R PACKING DIM A=0.35MM, B=0.7MM, C=1.0MM
- 1: T&R PACKING DIM A=0.40MM, B=1.0MM, C=1.0MM
- 2: T&R PACKING DIM A=0.35MM, B=0.7MM, C=0.7MM
- 3: T&R PACKING DIM A=0.40MM, B=1.0MM, C=0.7MM
- 0: G/F AT CONTACT AREA - MARK "0" WITH FCI LOGO
- 1: 5u" GOLD AT CONTACT AREA-MARK "1" WITH FCI LOGO
- 3: 30u" GOLD AT CONTACT AREA

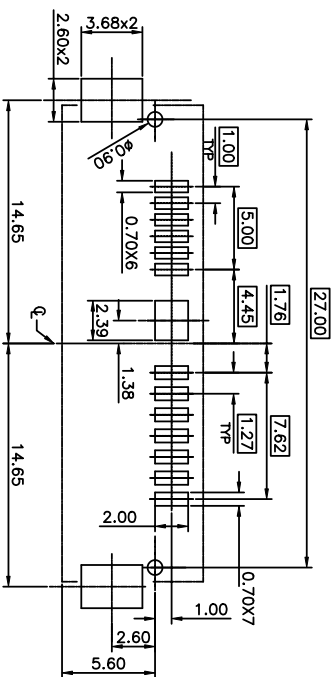

mat'l. code	ecn no	dr	date	tolerances unless otherwise specified	CUSTOMER COPY	projection	title	product family	code
A	107-1071	S.Lin	05/15/07	.X ± 0.38		MM	SLIM SATA 7+6P PLUG STANDARD R/A SMT.	SATA	TWN
B	107-1124	S.Lin	08/01/07	.XXX ± 0.15					2 of
C	108-1004	S.Lin	01/15/08	0° ±2°					
D	108-1069	S.Lin	04/09/08						
E	108-1089	S.Lin	05/09/08						
F	108-1092	S.Lin	05/19/08						

1 | 2

3

4

ACAD

code code