

Terminations

SMA, up to 18 GHz, 1 Watt

SPECIFICATIONS:


Models: 3016B, 3016BC

RoHS
Compliant




Electrical:	
Frequency Range _____	DC - 18 GHz
VSWR	
DC - 8 GHz _____	1.10:1 Max.
8 - 12.4 GHz _____	1.15:1 Max.
12.4 - 18 GHz _____	1.20:1 Max.
Impedance _____	50 Ohms
Input Power _____	1 Watt Avg. @ +25°C
	Derated Linearly to 0 Watts @ +125°C
Operating Temp Range _____	-55°C to +125°C
Mechanical:	
SMA Connectors	
Mates with MIL-STD-348	
Body _____	Passivated Stainless Steel
Coupling Nut _____	Passivated Stainless Steel
Conductors _____	Gold Plated Beryllium Copper or Brass
Bead Chain _____	Passivated Stainless Steel

Model Number: **3016B**
SMA Male Connector



Model Number: **3016BC**
SMA Male Connector

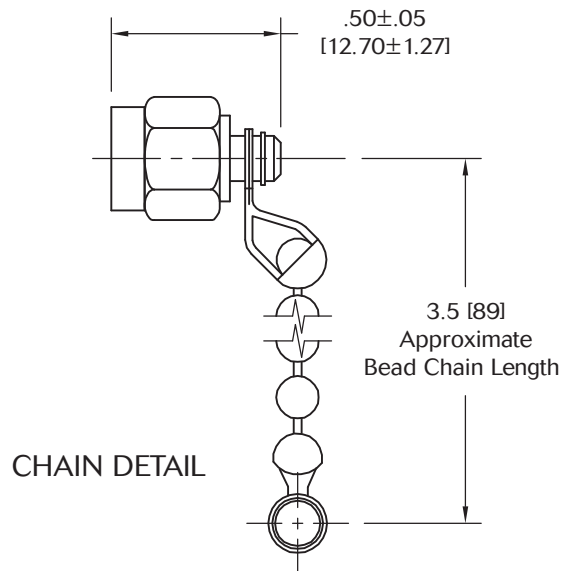

HOW TO ORDER:

Model Number: **3016BX**

- └ Style
- = No Chain
- C = Chain Included

Ordering Examples:

Model Number: **3016BC**
DC - 18 GHz; SMA Male; Chain Included

Model Number: **3016B**
DC - 18 GHz; SMA Male: No Chain

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

3016B: REV A



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet@aeroflex.com