



SO DIMM Sockets — Dual Read-Out for SDRAM Memory Modules

144 Positions — 0.8 mm SO DIMM (Metric)

Material and Finish

Housing — Nylon, UL94V-0 rated; color, natural.

Contact — Phosphor bronze with 0.00025 mm [0.000098 in.] min. thick gold over 0.001 mm [0.000393 in.] min. thick nickel in contact area and gold flash over 0.001 mm [0.000393 in.] min. thick nickel in soldering area.

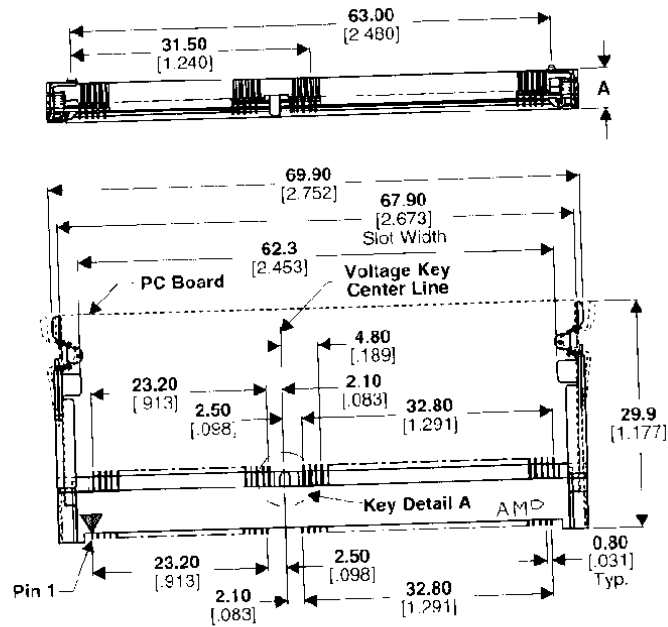

Housing Style	Dimension A	Power Supply: 3.3 Volt Key Type A
Standard	5.20 .205	390113-1
Low-Profile	4.00 .157	390114-1
High-Profile	5.60 .220	390112-1

For drawings, technical data or samples, contact your AMP sales engineer or call the AMP Product Information Center: 1-800-522-6752. Dimensions are in inches and in millimeters unless otherwise specified. Values in brackets are metric equivalents. Specifications subject to change. Consult AMP for latest specifications.