


- All DIP sockets accept 0,38 - 0,64mm diameter & standard IC leads.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Series 110 sockets use MM #1001 pins. See page 134 for details.
- Insulators are high temp. thermoplastic.



Total number of pins				Quantity per tube	Ordering Information							
	A	B	C									

Total number of pins	A	B	C	Quantity per tube	Ordering Information							
10	12,6	5,08	7,6	40	110-XX-210-41-001000							
4	5,0	7,62	10,1	102	110-XX-304-41-001000							
6	7,6	7,62	10,1	67	110-XX-306-41-001000							
8	10,1	7,62	10,1	50	110-XX-308-41-001000							
10	12,6	7,62	10,1	40	110-XX-310-41-001000							
14	17,7	7,62	10,1	28	110-XX-314-41-001000							
16	20,3	7,62	10,1	25	110-XX-316-41-001000							
18	22,8	7,62	10,1	22	110-XX-318-41-001000							
20	25,3	7,62	10,1	20	110-XX-320-41-001000							
22	27,8	7,62	10,1	18	110-XX-322-41-001000							
24	30,4	7,62	10,1	16	110-XX-324-41-001000							
28	35,5	7,62	10,1	14	110-XX-328-41-001000							
20	25,4	10,16	12,7	20	110-XX-420-41-001000							
22	27,8	10,16	12,7	18	110-XX-422-41-001000							
24	30,4	10,16	12,7	16	110-XX-424-41-001000							
28	35,5	10,16	12,7	14	110-XX-428-41-001000							
32	40,6	10,16	12,7	12	110-XX-432-41-001000							
24	30,5	15,24	17,7	16	110-XX-624-41-001000							
28	35,5	15,24	17,7	14	110-XX-628-41-001000							
32	40,6	15,24	17,7	12	110-XX-632-41-001000							
36	45,7	15,24	17,7	11	110-XX-636-41-001000							
40	50,8	15,24	17,7	10	110-XX-640-41-001000							
42	53,3	15,24	17,7	9	110-XX-642-41-001000							
48	60,9	15,24	17,7	8	110-XX-648-41-001000							
50	63,5	15,24	17,7	8	110-XX-650-41-001000							
52	66,0	15,24	17,7	7	110-XX-652-41-001000							
50	63,5	22,86	25,3	8	110-XX-950-41-001000							
52	66,0	22,86	25,3	7	110-XX-952-41-001000							
64	81,2	22,86	25,3	6	110-XX-964-41-001000							

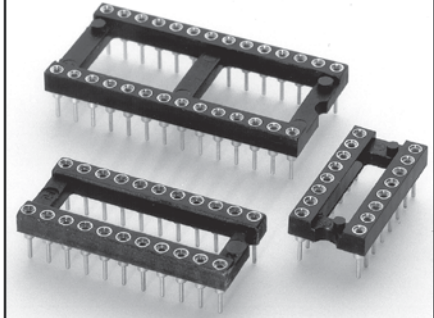

**XX= Plating Code
See Below**

**For RoHS compliance
select ◇ plating code.**

SPECIFY PLATING CODE XX=	13 ◇	91	93	99	41 ◇	43 ◇	44 ◇
Sleeve (Pin)	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	5,08µm Sn	5,08µm Sn
Contact (Clip)	0,76µm Au	0,25µm Au	0,76µm Au	5,08µm Sn/Pb	0,25µm Au	0,76µm Au	5,08µm Sn

Downloaded from Elcodis.com electronic components distributor