




Stacked Modular Jacks

Product Facts

- Performance exceeds Near End Crosstalk (NEXT) requirements of -40dB on all pair combinations at 100 MHz per EIA/TIA 568A
- All Stacked Jacks have Category 5 performance.
- Meets or exceeds FCC Part 68 rules and regulations with standard pc board foot-prints
- Low profile and narrow width allow more ports to be packed into less space
- Unshielded and shielded versions in popular size configurations
- Positive connection through-out life of equipment with insert molded contacts
- Accurately positioned solder tails reduce assembly labor while selectively deposited gold plating results in lower cost
- Center mounting leg standard on 8 port shielded and unshielded versions
- Available with two ground-ing paths; pc board & panel
- Listed by Underwriters Laboratories Inc.,  File No. E81956
- Certified by Canadian Standards Association,  File No. LR 7189A
- Produced under a Quality Management System Certified to ISO 9001
A copy of the certificate is available upon request

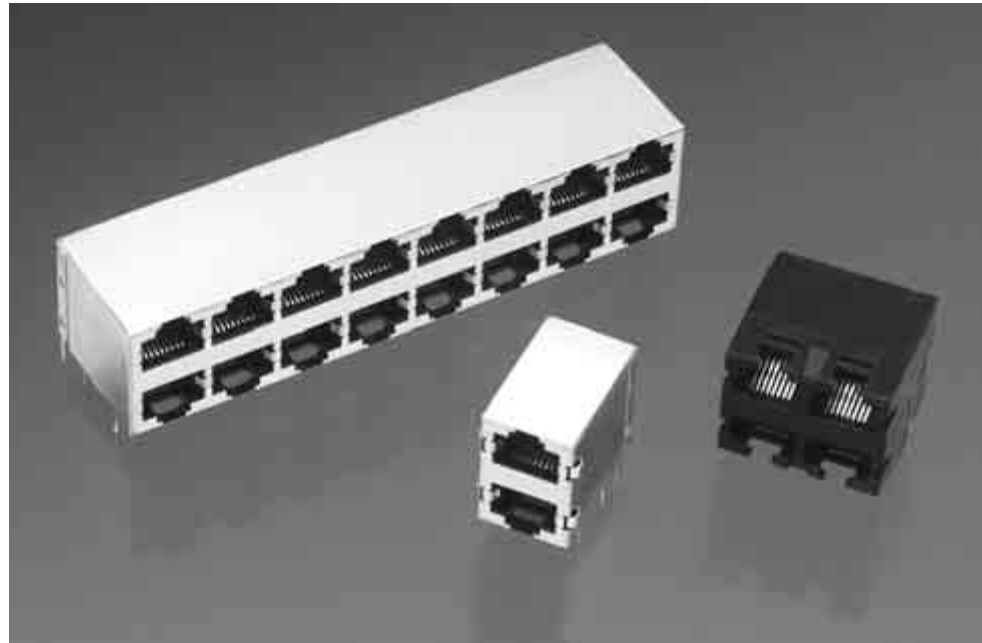

Specifications

Electrical

Current Rating — 1.5 amp max. @ 25°C

Voltage Rating — 150 VAC max.

Dielectric Withstanding Voltage — 1000 VAC

Insulation Resistance — 500 megaohms min.

Shielding Effectiveness — 20dB min., 10 to 200 MHz

Mechanical

Durability — 750 mating cycles

Mating/Unmating Forces — 5 lbs. max.

Operating Temperature — -40°C to 70°C

Material and Finish

Housing — High temperature Nylon, black UL 94V-0 rated, IR reflow compatible

Contact — .013 [0.33] Phosphor bronze; plated .000050 [0.00127] gold in localized area and .000150 [0.00381] tin-lead on solder tails, over .000050 [0.00127] nickel underplate

Shield — .010 [0.25] copper alloy tin-lead plated


Technical Documents

Application Specifications
114-02048

Product Specifications
108-1163-2

Stacked Modular Jacks (Continued)

Side Entry (RA), Thru-Hole

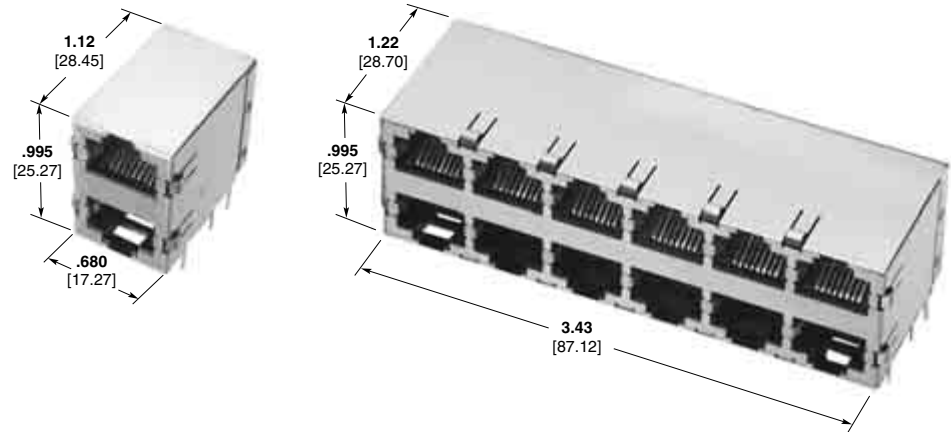

| No. of Ports | Part Number | Positions/Contacts | LEDs | Shielded | Performance | Panel Stops | Inverted | Ground Options |
|--------------|-------------|--------------------|---------|----------|-------------|-------------|----------|----------------|
| 2 x 1 | 5569381-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 2 | 5569260-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 3 | 5569256-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | PCB Ground |
| 2 x 4 | 1734715-2 | 8/8 | Without | Yes | Cat 3 | Without | N/A | Panel and PCB |
| 2 x 4 | 5569257-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | PCB Ground |
| 2 x 4 | 5569262-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 6 | 5406494-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 6 | 5569263-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 8 | 5569254-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | PCB Ground |
| 2 x 8 | 5569259-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | PCB Ground |
| 2 x 8 | 5569264-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |

Note: Consult Tyco Electronics Sales Representative for additional Part Numbers and features differences (tail length, LED color, IRR, etc.)



Hole location varies among modular jack assemblies and is determined by the dimension from the center of the board-lock or guide pin mounting legs to the center of the shield tab solder tine.

Note: All part numbers are RoHS compliant.

Stacked Modular Jacks

Stacked Modular Jacks (Continued)

**Side Entry (RA),
Press Fit/Offset**

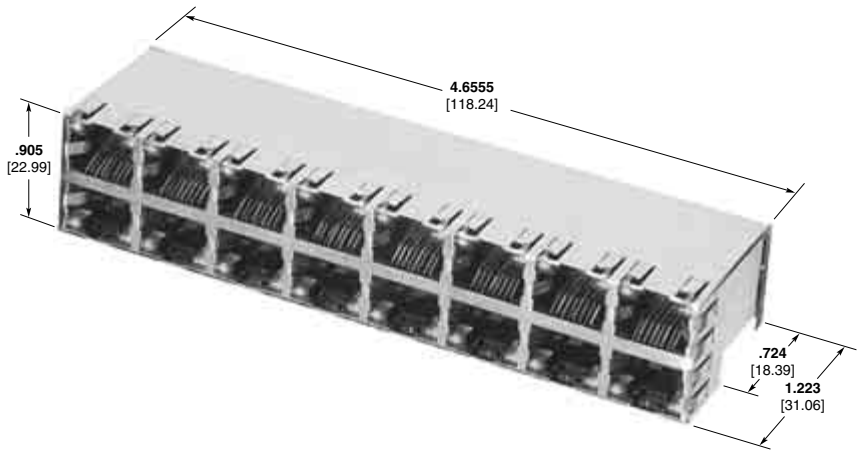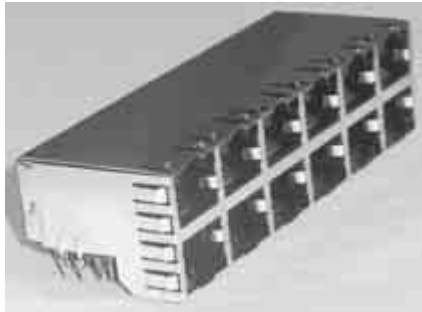


| No. of Ports | Part Number | Positions/Contacts | LEDs | Shielded | Performance | Panel Stops | Inverted | Ground Options |
|--------------|-------------|--------------------|---------|----------|-------------|-------------|----------|----------------|
| 2 x 4 | 6368077-2 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 4 | 6368062-1 | 8/8 | With | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 4 | 1368077-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 6 | 6368035-1 | 8/8 | With | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 6 | 6368116-2 | 8/8 | With | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 8 | 6116689-1 | 8/8 | Without | Yes | Cat 5 | Without | N/A | Panel and PCB |
| 2 x 8 | 6116317-2 | 8/8 | With | Yes | Cat 5 | Without | N/A | Panel and PCB |

Note: Consult Tyco Electronics Customer Drawing for additional Part Numbers.

Stacked Modular Jacks

RJ45, Dual USB



| No. of Ports | Part Number | Positions/Contacts | LEDs | Shielded | Performance | Panel Stops | Inverted | Ground Options |
|--------------|-------------|--------------------|---------|----------|-------------|-------------|----------|----------------|
| 2 x 1 | 6116151-2 | 8/8 | With | Yes | Cat 5 | Without | No | PCB |
| 2 x 1 | 6116151-1 | 8/8 | Without | Yes | Cat 5 | Without | No | PCB |
| 2 x 1 | 6116640-1 | 8/8 | With | Yes | Cat 5 | Without | No | PCB |

Note: Consult Tyco Electronics Customer Drawing for additional Part Numbers.

Note: All part numbers are RoHS compliant.