

MODS-F-8P8C-U-6-1-TH

MOD JACK WITH LEDS MODS-F SERIES

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MODS-F

Insulator Material: Nylon 46 (For both -SM and -TH)



Contact Material: Phosphor Bronze

Shield Material: Copper Alloy

Plating: Gold on Contacts, Nickel on Shield, Gold on Tails

Operating Temp Range: -25°C to +90°C

Current Rating: 1.5 A per contact

Voltage Rating: 120 VAC max

Contact Resistance: 20 mΩ max

Minimum Cycles: 500

System Applications: CAT3



Packaging: Packaged and shipped in Bulk Packaging Trays; Trays suitable for automation are available upon request.

RoHS Compliant: Yes

Lead-Free Solderable: Yes (Wave Solder only)

APPLICATION SPECIFIC OPTION

Other plating options available. Call Samtec.

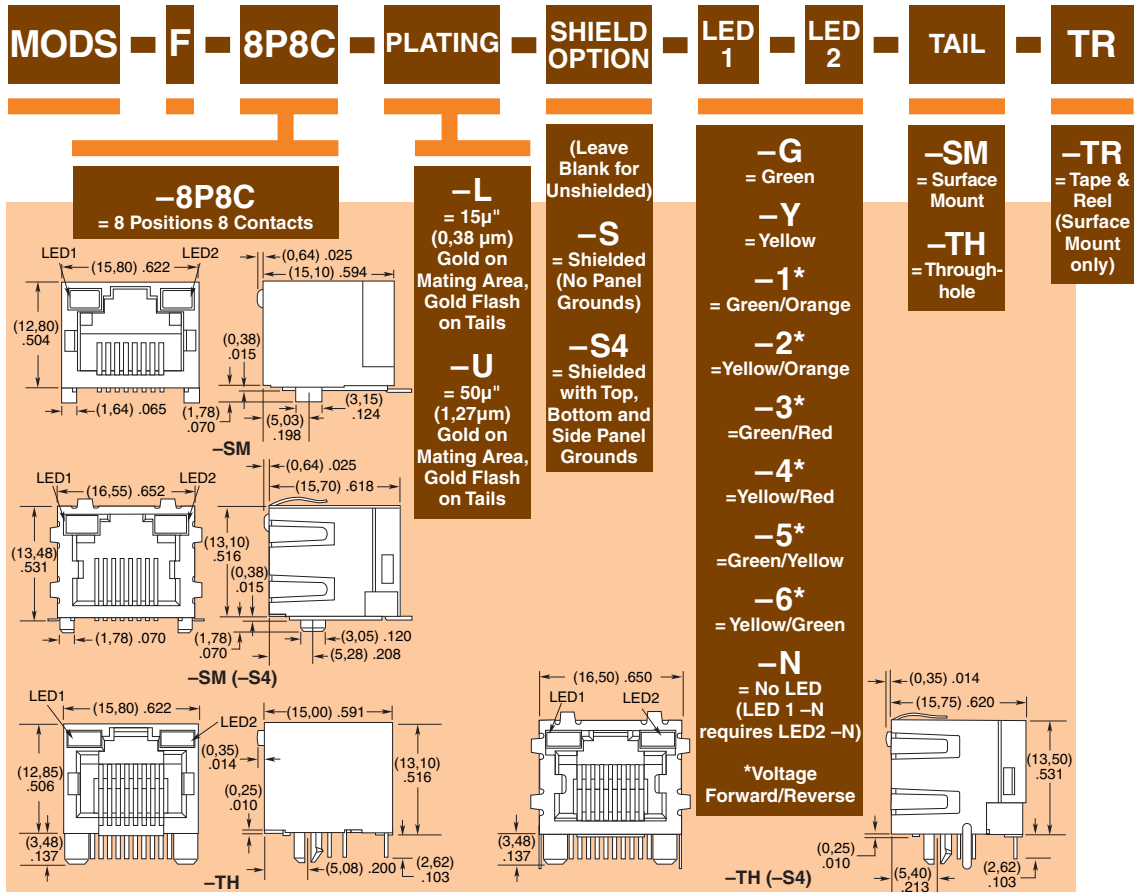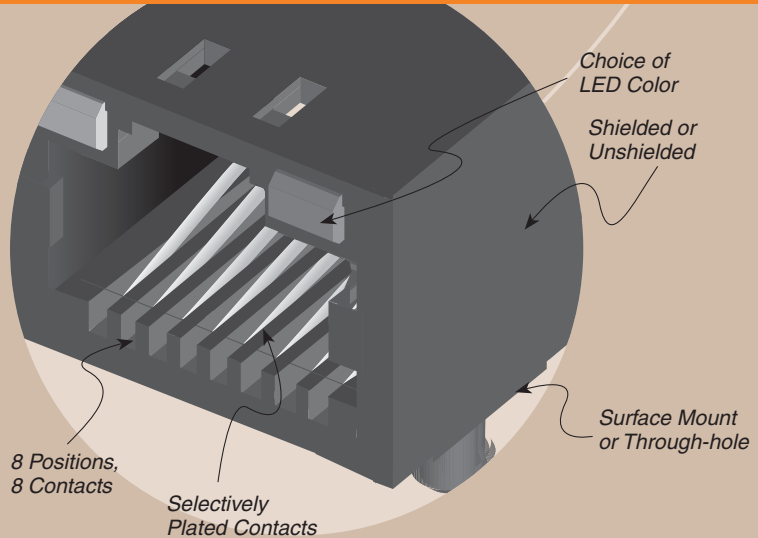

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM