

MODS-F-8P8C-U-6-1-TH

MOD JACK WITH LEDS MODS-F SERIES

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MODS-F

Insulator Material: Nylon 46 (For both -SM and -TH)



Contact Material: Phosphor Bronze

Shield Material: Copper Alloy

Plating: Gold on Contacts, Nickel on Shield, Gold on Tails

Operating Temp Range: -25°C to +90°C

Current Rating: 1.5 A per contact

Voltage Rating: 120 VAC max

Contact Resistance: 20 mΩ max

Minimum Cycles: 500

System Applications: CAT3



Packaging: Packaged and shipped in Bulk Packaging Trays; Trays suitable for automation are available upon request.

RoHS Compliant: Yes

Lead-Free Solderable: Yes (Wave Solder only)

APPLICATION SPECIFIC OPTION

Other plating options available. Call Samtec.

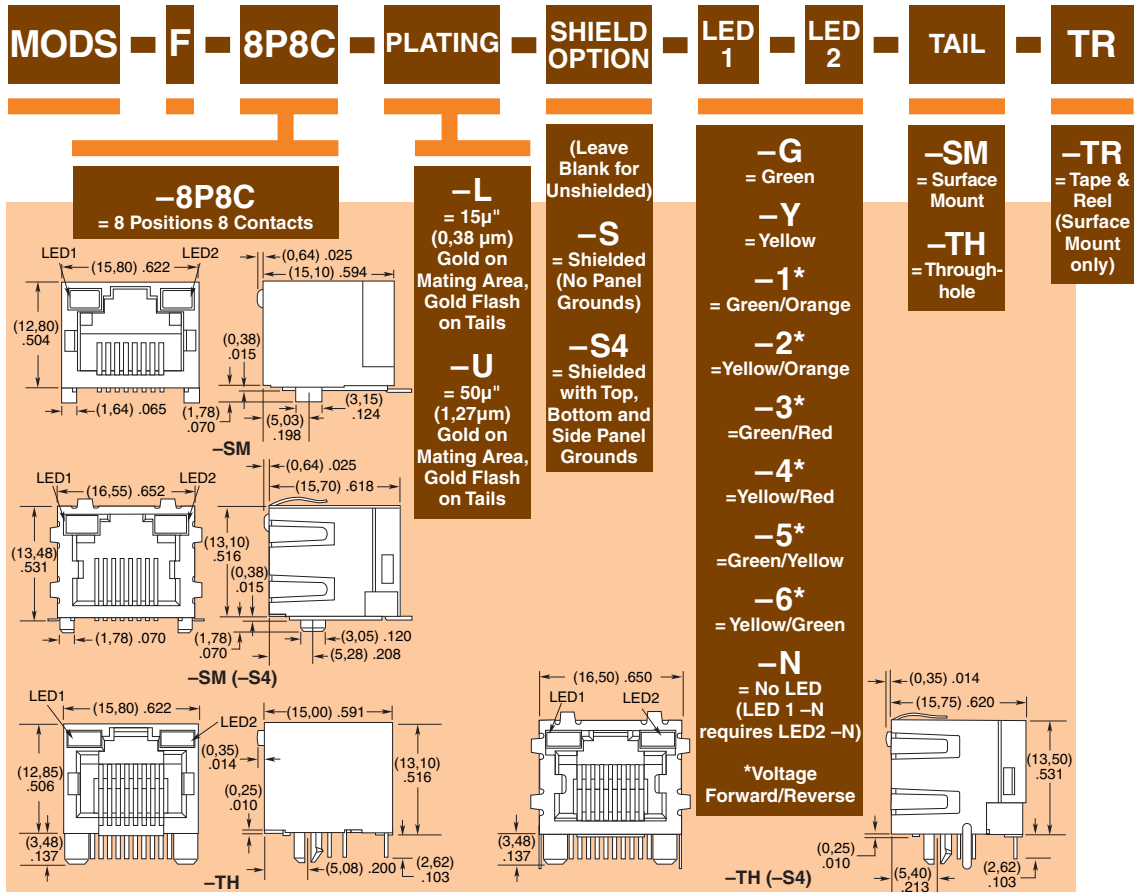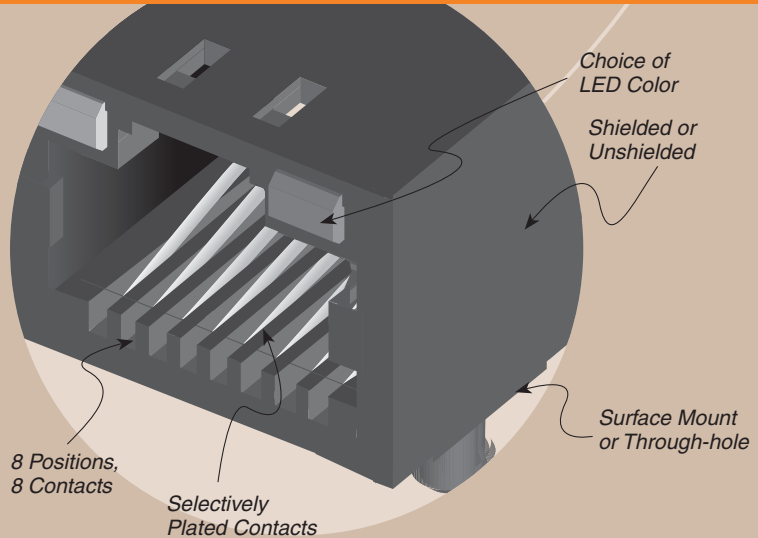

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047

SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520

SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113

SAMTEC GERMANY • Tel: +49 (0) 89/89460-0 • Fax: +49 (0) 89/89460-299

SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61

SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315

SAMTEC NORDIC/BALTIC • Tel: +46-84477280 • Fax: +46-87420413

SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690

SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187

SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502

SAMTEC JAPAN • Tel: 045-475-1385 • Fax: 045-475-1340

SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-5423 4575

SAMTEC TAIWAN • Tel: 886-2-2735-6109 • Fax: 886-2-2735-5036

SAMTEC HONG KONG • Tel: 852-2600-4850 • Fax: 852-2600-4842

SAMTEC KOREA • Tel: 82-31-717-5685 • Fax: 82-31-717-5681

SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 • Fax: 27 86 6714432

SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745