


**Series 1.6/5.6 mS (75 Ω) (Continued)**


**Connectors**

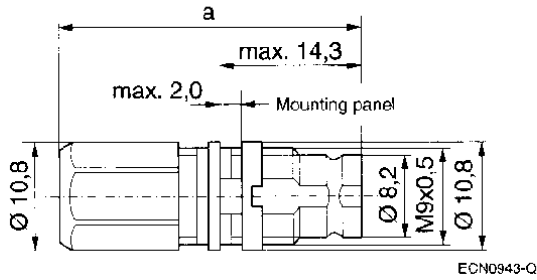

**Bulkhead jack with cable connection**


Coupling type	Dim. a	Suitable for cable		Part. No.
		Ø max. mm	cable type	
A, B, F	28.1	4.1	2YCY 0,4/2,5	3-1393682-2
A, B, F	28.1	4.8 5.0	2YCCY 0,4/2,5 2YC(mS)CY 0,4/2,5	3-1393682-3
A, B, F	30.4	6.1 6,25 6.2	2YCY 0,7/4,4 RG 59 2YC(mS)CY 0,5/3,0	3-1393682-5

packing unit = 100

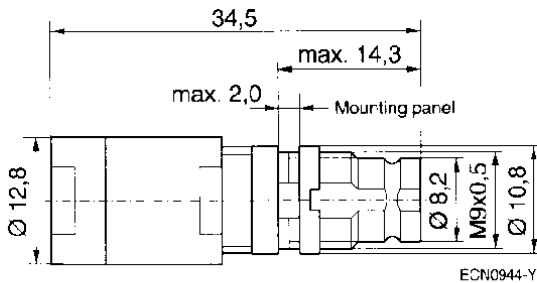


Coupling type	Suitable for cable		Part. No.
	Ø max. mm	cable type	
A, B, F	9,8 9,8	2YCCY 1,0/6,5 2YC(mS)CY 1,0/6,5	1393682-4

packing unit = 100

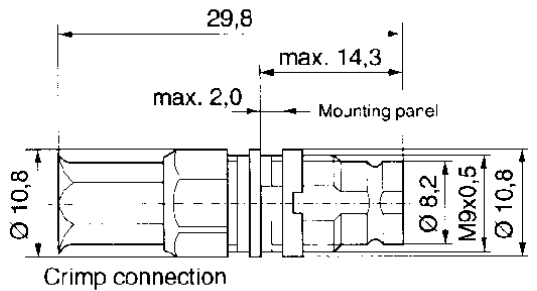

Coupling type	Suitable for cable		Part. No.
	Ø max. mm	cable type	
A, B, F	2,67	RG 179	2-1393680-2
A, B, F	4.0	02Y12YC(mS)C6Y 0,45/2,0	2-1393680-4
A, B, F	3,3	06YCC(SI)6Y 0,4/1,6	2-1393680-5
A, B, F	3,6	02Y(SI)CY 0,45/2,0	1393672-6

packing unit = 100

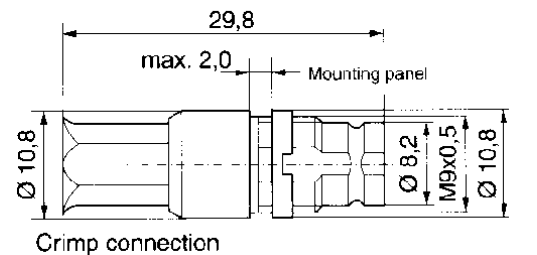

**Version with preassembled insulation parts**

Coupling type	Suitable for cable		Part. No.
	Ø max. mm	cable type	
A, B, F	3,6	02Y(SI)CY 0,45/2,0	1-1393672-4

packing unit = 100