
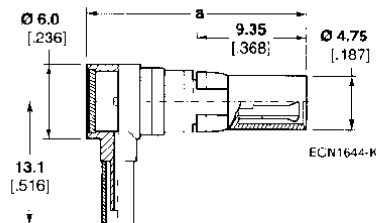
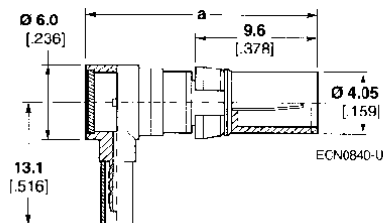
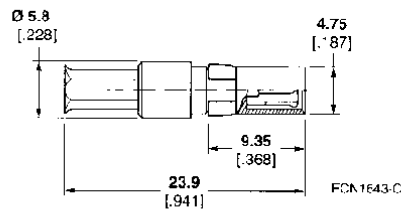


DIN Inserts (Continued)

Coaxial Inserts (50 Ω/75 Ω)

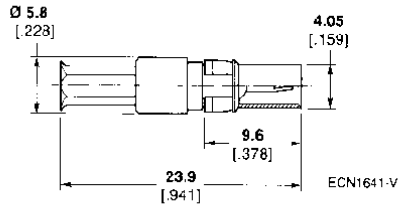

Bulkhead cable jack for male connectors

Ø Max.	Cable Type	Width Across Flats of Hex Profile	Part No.
2.6 .102	RG 316 (50 Ω)	3.2 .126	1392020-1
2.67 .105	RG 179 (75 Ω)	3.2 .126	3-1393668-4

Bulkhead cable jack for female connectors

Ø Max.	Cable Type	Width Across Flats of Hex Profile	Part No.
2.6 .102	RG 316 (50 Ω)	3.2 .126	1392019-1
2.67 .105	RG 179 (75 Ω)	—	3-1393668-0

Right Angle Bulkhead Jack for male connectors

Dim a	Ø Max.	Cable Type	Width Across Flats of Hex Profile	Part No.
19 .748	2.6 .102	RG 316 (50 Ω)	3.2 .126	1-1393668-2
	2.67 .105	RG 179 (75 Ω)		
22.4 .882	2.67 .105	RG 179 (75 Ω)	3.2 .126	2-1393668-8
	24.0 .945	2.67 .105	RG 179 (75 Ω)	3.2 .126

Right Angle Bulkhead Plug for female connectors

Dim a	Ø Max.	Cable Type	Width Across Flats of Hex Profile	Part No.
18.7 .736	2.6 .102	RG 316 (50 Ω)	—	1393668-4
22.3 .878	2.6 .102	RG 316 (50 Ω)	—	1393668-8
18.7 .736	3.0 .118	RG 316 (50 Ω)	—	1393668-7
18.7 .736	2.67 .105	RG 179 (75 Ω)	3.2 .126	2-1393668-4