


DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE PROJECTION

NOTES:

- △ BARREL TERMINALS WILL ACCEPT ON OR TWO WIRES WITH THE SAME SIZE PER TERMINAL. WIRE RANGE FOR SOLID AND STRANDED WIRES: 0.12 mm² (AWG 26) - 0.35 mm² (AWG 22). MAXIMUM INSULATION Ø: 1.2 mm.
- △ 8 POSITION STUFFER CAP AND SINGLE WIRE STUFFER CAP ARE SHIPPED NOT ASSEMBLED.
- △ MATERIALS: 8 POS. STUFFER CAP: ABS NATURAL
1 WIRE STUFFER CAP: NYLON
BARREL TERMINALS: PHOS. BRONZE PRE-TINPLATED
CONTACTS: PHOS. BRONZE PLATED 1.25 µm SELECTIVE GOLD OVER 1.25 µm NICKEL
HOUSING KEY: PBT, COLOR BLACK UL 94HB
SHIELD: BRASS PRE-TINPLATED
- △ REMOVABLE KEY IS SHIPPED NOT ASSEMBLED.
- △ ADDITIONAL HARDWARE IS REQUIRED FOR PANEL MOUNTING FOR INSTANCE MOUNTING CLIP 100575-1 (IS NOT INCLUDED).

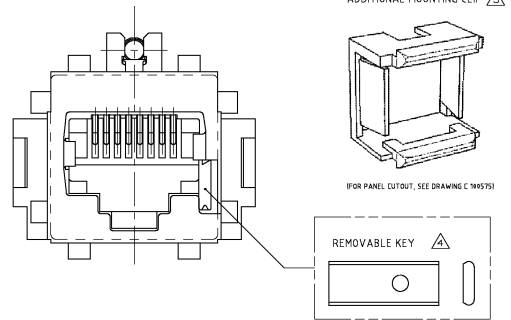

500 PCS IN A BOX	SEE NOTE	SEE NOTE	216811-1
PACKAGING	FINISH	MATERIAL	P/N
CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED			
© COPYRIGHT 1988 BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.			
THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION			
G	SRI0-0119-01	KV	20 MAR 01
F	H-8627	J.T.	25 OCT 93
E	H-8627	J.T.	02 AUG 93
D	H-8627	J.T.	13 APR 92
C	H-8627	J.H.L.	04 NOV 91
LTR	REVISION RECORD	DR	CHK. DATE
DR: J.A.L/SWP	CHK: W.BRUMMIG	APP: J.A.HH/SSEST	DWG. No. C-216811
DATE: 04 NOV 91	DATE:	DATE: 27 OCT 93	REV. LTR. G
11	10	9	8
7	6	5	4
3	2	1	A2