

ZEC 1,5/ 6-LPV-5,0 C2

Order No.: 1898305

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1898305>Printed circuit board connector, Nominal current: 10 A, Nom. voltage:
250 V, Pitch: 5 mm, Number of positions: 6

Commercial data	
EAN	4017918167011
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.005516 KG
Catalog page information	Page 299 (CC-2009)

Product notesWEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions	
Pitch	5 mm
Dimension a	30 mm
Number of positions	6

Technical data

Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	10 A
Nominal voltage U_N	250 V
Maximum load current	10 A
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals



Certification CB, CUL, UL, VDE-PZI

CUL

Nominal voltage U_N	300 V
Nominal current I_N	10 A


UL

Nominal voltage U_N	300 V
Nominal current I_N	10 A

Diagrams/Drawings


Drilling plan/solder pad geometry

Size of the PCB: 1.6 ± 0.2 mm

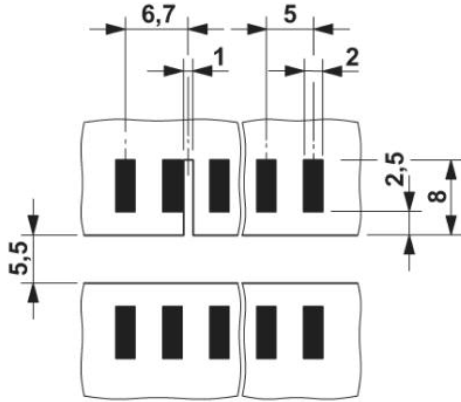


Diagram

Plug: ZEC 1,5/6-LPV-5,0 C2

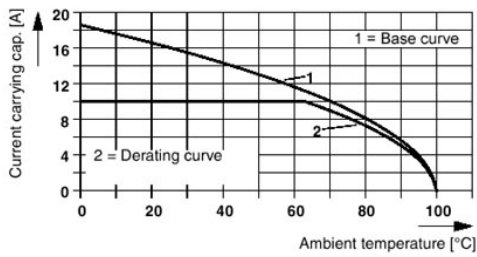

Dimensioned drawing

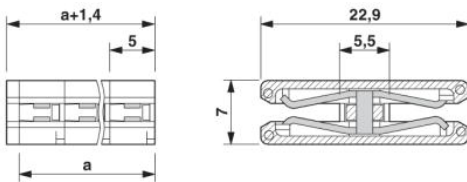

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;