


5.0mm)
5.08 mm)

ED350/X (5.0 mm)
EDZ350/X (5.08 mm)

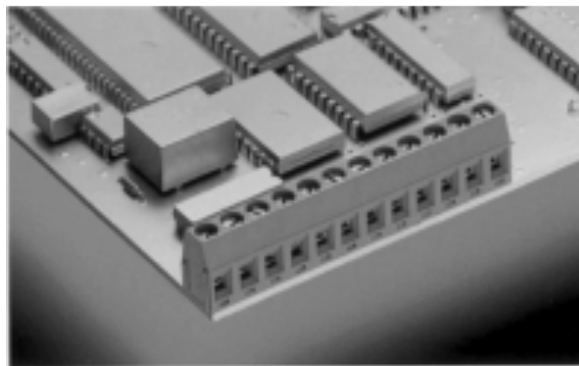

Spacing 5.0 mm or 5.08 mm
insert required no. of poles X
How to order see page 5

2-12 poles, Spacing 5.0 mm and 5.08 mm
insert required no. of poles X
How to order see page 5



300V
16 A
AWG 22-12
2.5 mm²
2.0 kV
0.5 Nm/M2.6

2.5 mm²
1.5 mm²
1.5 mm²

5.0 mm (5.08 mm)
1.3 mm
7.0 mm

PA
UL94 V-0
-30°C/+105°C
CuZn
Cu



*factory wiring


Ratings:

Rated Voltage	300V	250 V
Rated Current	16 A	24 A (T60)
Wire Size	AWG* 28-12	2.5 mm ²
Test Voltage		2.0 kV
Rated Torque/ScrewSize		0.5 Nm/M3

Max. Rated Cross Section

Single Wire (solid)	2.5 mm ²
Stranded Wire (flexible)	1.5 mm ²
Stranded wire with Ferrules	1.5 mm ²

Dimensions

Spacing	5.0 mm (5.08 mm)
PCB Hole Diameter	1.3 mm
Stripped Length	6.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu

Color

Green

