


2-12 poles, Spacing 7.5 mm  
insert required no. of poles X  
How to order see page 5



2-12 poles, Spacing 7.5 mm  
insert required no. of poles X  
How to order see page 5

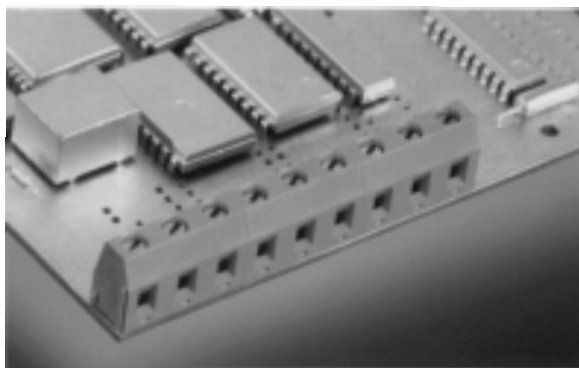

300V  
16 A  
AWG 22-12

750 V  
24 A (T60)  
2.5 mm<sup>2</sup>  
3.0 kV  
0.5 Nm/M3

2.5 mm<sup>2</sup>  
1.5 mm<sup>2</sup>  
1.5 mm<sup>2</sup>

7.5 mm  
1.3 mm  
6.0 mm

PA  
UL94 V-0  
-30°C/+105°C  
CuZn  
Cu



**Ratings**

Rated Voltage  
Rated Current  
Wire Size  
Test Voltage  
Rated Torque/ScrewSize

300V  
16 A  
AWG 22-12

750 V  
24 A (T60)  
2.5 mm<sup>2</sup>  
3.0 kV  
0.5 Nm/M3

**Max. Rated Cross Section**

Single Wire (solid)  
Stranded Wire (flexible)  
Stranded wire with Ferrules

2.5 mm<sup>2</sup>  
1.5 mm<sup>2</sup>  
1.5 mm<sup>2</sup>

**Dimensions**

Spacing  
PCB Hole Diameter  
Stripped Length

7.5 mm  
1.3 mm  
6.0 mm

**Materials**

Insulating Material  
Flammability Class  
Temperature Range  
Terminal Block  
Wire Guard

PA  
UL94 V-0  
-30°C/+105°C  
CuZn  
Cu

**Color**

Green

