
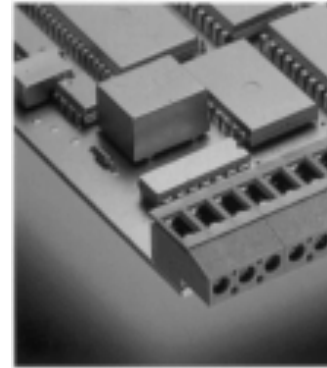


**ED700/X (5.0 mm)**  
**EDZ700/X (5.08 mm)**

**ED705/X (5.0 mm)**  
**EDZ705/X (5.08 mm)**

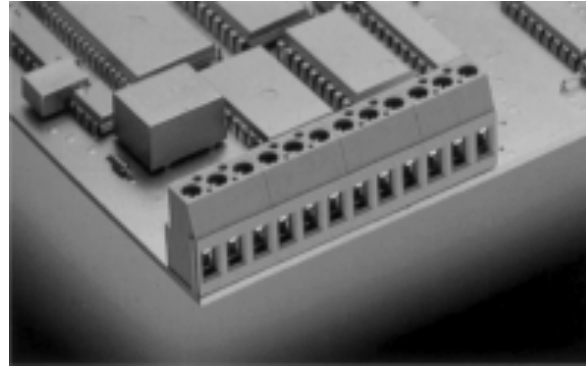

2-12 poles, Spacing 5.0 mm and 5.08 mm  
 insert required no. of poles X  
 How to order see page 5

2-12 poles,



**Ratings:**

Rated Voltage	<b>300V</b>	<b>250 V</b>
Rated Current	<b>20 A</b>	<b>24 A (T60)</b>
Wire Size	<b>AWG 30-12</b>	<b>2.5 mm<sup>2</sup></b>
Test Voltage		<b>2.0 kV</b>
Rated Torque/ScrewSize		<b>0.5 Nm/M3</b>

**Ratings:**

Rated Voltage	
Rated Current	
Wire Size	
Test Voltage	
Rated Torque/ScrewSize	

**Max. Rated Cross Section**

Single Wire (solid)	<b>4.0 mm<sup>2</sup></b>
Stranded Wire (flexible)	<b>2.5 mm<sup>2</sup></b>
Stranded wire with Ferrules	<b>2.5 mm<sup>2</sup></b>

**Max. Rated Cross Section**

Single Wire (solid)	
Stranded Wire (flexible)	
Stranded wire with Ferrules	

**Dimensions**

Spacing	<b>5.0 mm (5.08 mm)</b>
PCB Hole Diameter	<b>1.3 mm</b>
Stripped Length	<b>8.0 mm</b>

**Dimensions**

Spacing	
PCB Hole Diameter	
Stripped Length	

**Materials**

Insulating Material	<b>PA</b>
Flammability Class	<b>UL94 V-0</b>
Temperature Range	<b>-30°C/+105°C</b>
Terminal Block	<b>CuZn</b>
Wire Guard	<b>Cu</b>

**Materials**

Insulating Material	
Flammability Class	
Temperature Range	
Terminal Block	
Wire Guard	

**Color**

Green

**Color**

Green

