


0 mm adjustable to 5.08 mm  
insert required no. of poles **X**  
How to order see page 5



1-n poles, Spacing 5.0 mm adjustable to 5.08 mm  
insert required no. of poles **X**  
How to order see page 5

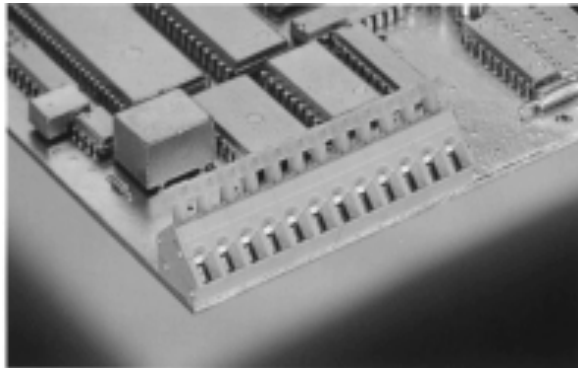

0 V  
A  
WG 28-14

250 V  
24 A (T60)  
2.5 mm<sup>2</sup>  
2.0 kV

2.5 mm<sup>2</sup>  
2.5 mm<sup>2</sup>  
1.5 mm<sup>2</sup>

5.0 mm (5.08 mm)  
1.0 mm (2x)  
6.0 mm

PA  
UL94 V-0  
-30°C/+105°C  
Stainless Steel  
Cu



**Ratings:**

Rated Voltage	300 V	250 V
Rated Current	16 A	24 A (T60)
Wire Size	AWG 28-14	2.5 mm <sup>2</sup>
Test Voltage		2.0 kV

**Max. Rated Cross Section**

Single Wire (solid)	2.5 mm <sup>2</sup>
Stranded Wire (flexible)	2.5 mm <sup>2</sup>
Stranded wire with Ferrules	1.5 mm <sup>2</sup>

**Dimensions**

Spacing	5.0 mm (5.08 mm)
PCB Hole Diameter	1.0 mm (2x)
Stripped Length	6.0 mm

**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

**Color**

Slade Grey

