

2-12 poles, Spacing 5.08 mm  
insert required no. of poles **X**  
How to order see page 5




300 V  
20 A  
AWG 30-12

250 V  
22 A (T60)  
2.5 mm<sup>2</sup>  
2.0 kV  
05 Nm/M3

4.0 mm<sup>2</sup>  
2.5 mm<sup>2</sup>  
2.5 mm<sup>2</sup>

5.08 mm  
1.3 mm  
8.0 mm

PA  
UL94 V-0  
-30°C/+105°C  
CuZn  
Cu

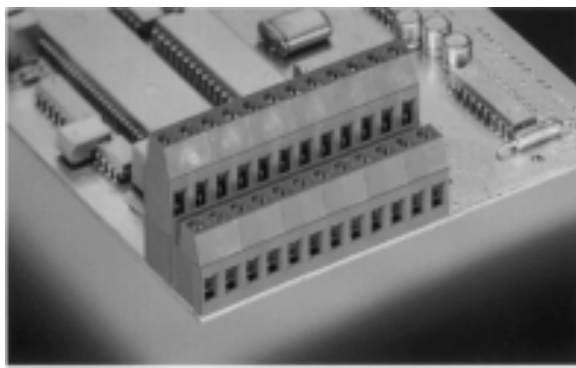

2-12 poles, Spacing 5.0 mm  
insert required no. of poles **X**  
How to order see page 5



**Ratings:**

Rated Voltage	300 V	250 V
Rated Current	20 A	24 A (T60)
Wire Size	AWG 30-12	2.5 mm <sup>2</sup>
Test Voltage		2.0 kV
Rated Torque/ScrewSize		0.5 Nm/M3

**Max. Rated Cross Section**

Single Wire (solid)	4.0 mm <sup>2</sup>
Stranded Wire (flexible)	2.5 mm <sup>2</sup>
Stranded wire with Ferrules	2.5 mm <sup>2</sup>

**Dimensions**

Spacing	5.0 mm
PCB Hole Diameter	1.3 mm
Stripped Length	8.0 mm

**Materials**

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu

**Color**

Green

