
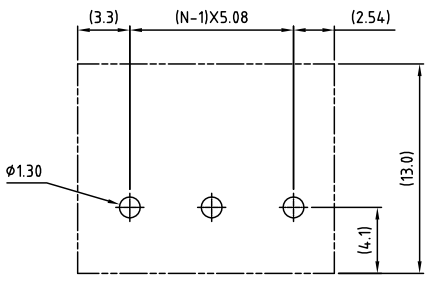

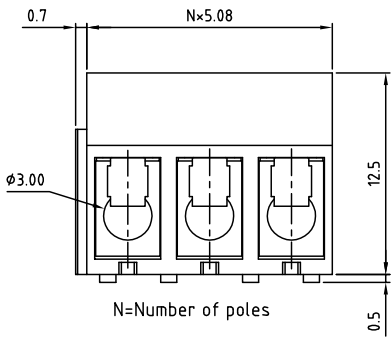


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



- Material**
- Terminal body (metal housing): Brass(CuZn)
 - Terminal screw: Steel Zinc plating "-" slot type
 - Wire guard: Stainless steel
 - Surface of solder tail: Tin plated
 - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical**
- Voltage rating: 250VAC
 - Current rating: 15A
 - Wire range:
 - Solid wire(AWG): 14-22
 - Stranded wire(AWG): 14-22
 - Torque: 3.5Lb-In
 - Screw: M3
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:

RoHS Compliant

PART NUMBER:

OSTTBXX2161

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green
...	6: Blue (Standard)
24 24 Poles	8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE	OSTTB 5.08 series 1-interlock			
PART NO.	OSTTBXX2161	DWG NO.	OSTTBXX2161.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST. NO.
	Marvin 2006.02.11	Marvin 2006.02.11	Marvin 2006.02.11	
				Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*
				UNIT: mm SCALE: NONE SHEET: 01/01 REV: C