
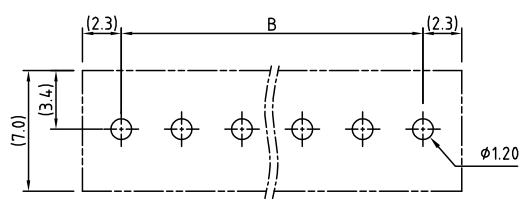
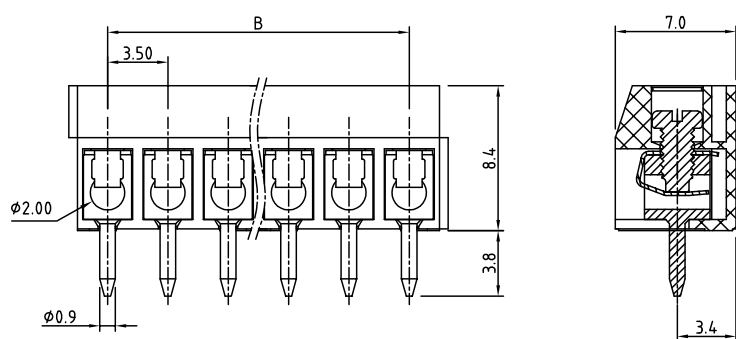


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

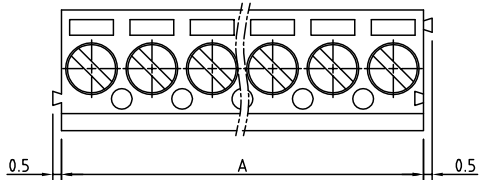

P.C.B. LAYOUT

- Material:
- Terminal body
 - (metal housing): Brass(CuZn)
 - Terminal screw: Steel Plated Zinc
 - Wire guard: Stainless steel
 - Surface of solder tail: Tin plated
 - Insulator(housing): Thermoplastic (UL94V-0)

- Electrical:
- | | | |
|--------------------------|------------------|----------|
| ● Voltage rating: | UL 125V | CSA 125V |
| ● Current rating: | 10A | 10A |
| ● Wire range: | | |
| ● Solid wire(AWG): | 16-26 | 16-26 |
| ● Stranded wire(AWG): | 16-26 | 16-26 |
| ● Torque: | 1.7Lb-In | 4 Kgf.cm |
| ● Screw: | M2 | |
| ● Wire strip length: | 5-6mm | |
| ● Withstanding Voltage: | 1.25 KV | 1.25 KV |
| ● Operating temperature: | -30°C to +105°C | |
| ● Soldering temperature: | 245°C±10°C/5 Sec | |

RoHS Compliant

PART NUMBER

OSTTEXX0164

- | | |
|--------------|--------------------|
| No. of Poles | COLOR |
| 02: 2 Poles | 0: Black |
| 03: 3 Poles | 5: Green |
| ... | 6: Blue (Standard) |
| 24 24 Poles | 8: Grey |

POLE	2	3	4	5	6	7	8	9	10	11	12	
A	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00	
B	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	
Tol.	±0.10					±0.15						
POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	84.00
B	42.00	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50
Tol.	±0.20					±0.30						

TITLE		OSTTE 3.5mm Solid block series "-" Screw	
PART NO.	OSTTEXX0164	DWG NO.	OSTTEXX0164.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
		Tony 2007.12.12	Tony 2007.12.12
		CUST NO.	
		Tolerance	
		X. ±0.50	
		X.X ±0.30	
		X.XX ±0.10	
		X* ±1*	